Starlock accessories:





01/2018 edition



The best of the best in one set: **E-Cut saw blades with Starlock.**

The attractive set of Starlock accessories has many advantages, that more than pay for themselves in daily work.

- ► The E-Cut saw blades cover the whole range of materials from soft and hard wood, to metals and nails.
- ▶ Maximum compatibility: suitable for oscillating multi-tools from FEIN, Bosch, Metabo, Milwaukee, Ridgid, Skil and many other
- ► Large scope of supply: 2 x E-Cut long-life 160 (length 50 mm, width 35 mm), 2 x E-CuT long-life 221 (length 50 mm, width 50 mm), 2 x E-Cut standard 222 (length 35 mm, width 28 mm)



| Length | Width | ~ . | м | 0.1 | RRP | in £ |
|--------|-------|------------|----------|------------------|----------|-----------|
| mm | mm | Qty. | Mounting | Order no. | plus VAT | incl. VAT |
| 50 | 35 | 2 | SL | | | |
| 50 | 50 | 2 | SL | 3 52 22 952 30 0 | 29.95 | 35.94 |
| 35 | 28 | 2 | SL | | | |

Curved HCS saw blade - ideal for cuts in painted, coated or veneered wooden surfaces.

Ideal for cuts in high-quality surfaces and recesses in furniture or kitchens. Also perfect for feedthroughs for cables and ducts in side parts, worktops and rear walls of niches.

| Curveu nC3 | WOOD |
|--|---|
| Set teeth for all wood, plasterboard and plast | cic materials, high |
| cutting quality and speed. Bent cutting geome | etry for optimum |
| plunging and clean, precise cut edges, especia | lly on smooth |
| | Set teeth for all wood, plasterboard and plast cutting quality and speed. Bent cutting geome plunging and clean, precise cut edges, especia |

| A | |
|---|---|
| | Wide shape for maximum cutting performance and long, straight cuts. |

| Length | Width | 04 | M 4! | 0 | RRP i | n £ |
|--------|-------|------|----------|------------------|----------|-----------|
| mm | mm | Qty. | Mounting | Order no. | plus VAT | incl. VAT |
| 50 | 65 | 1 | SL | 6 35 02 225 21 0 | 11.91 | 14.29 |
| 50 | 65 | 3 | SL | 6 35 02 225 22 0 | 33.95 | 40.74 |
| 50 | 65 | 5 | SL | 6 35 02 225 23 0 | 53.61 | 64.33 |
| 50 | 65 | 10 | SL | 6 35 02 225 24 0 | 101.26 | 121.51 |
| 50 | 65 | 50 | SL | 6 35 02 225 25 0 | 482.49 | 578.99 |

Curved HCS WOOD Narrow, with waist for optimum cutting speed and good swarf removal.

| Length mm | Width mm | Qty. | Mounting | Order no. | RRP in | n £ |
|--------------|-------------|------|----------|------------------|--------|--------|
| 55 | 35 | 1 | SL | 6 35 02 227 21 0 | • | 13.24 |
| 33 | 33 | 1 | 3L | 0 33 02 227 21 0 | 11.03 | 13.24 |
| 55 | 35 | 3 | SL | 6 35 02 227 22 0 | 31.42 | 37.70 |
| 55 | 35 | 5 | SL | 6 35 02 227 23 0 | 49.62 | 59.54 |
| 55 | 35 | 10 | SL | 6 35 02 227 24 0 | 93.72 | 112.46 |
| 55 | 35 | 50 | SL | 6 35 02 227 25 0 | 483.43 | 580.12 |

| Medium width for various uses. | | | | | | |
|--------------------------------|-------------|------|----------|------------------|--------|------------------|
| Length mm | Width mm | Qty. | Mounting | Order no. | RRP in | n € incl. VAT |
| 50 | 50 | 1 | SL | 6 35 02 226 21 0 | 11.50 | 13.80 |
| 50 | 50 | 3 | SL | 6 35 02 226 22 0 | 32.76 | 39.31 |
| 50 | 50 | 5 | SL | 6 35 02 226 23 0 | 51.73 | 62.08 |
| 50 | 50 | 10 | SL | 6 35 02 226 24 0 | 97.71 | 117.25 |
| 50 | 50 | 50 | SL | 6 35 02 226 25 0 | 465.56 | 558.67 |

The loyalty promotion for saw blades -4 steps to free saw blades of your choice:

Collect FEIN loyalty points and once you have bought 25 FEIN E-Cut products, you will receive a free pack of 3 saw blades of your choice,



2. Register Scan the QR code or register at www.fein.com/bonus, upload your invoice and enter the EAN code.



*1 FEIN E-Cut saw blade = 1 loyalty point. Saw blades included in promotion: FEIN E-CuT saw blades in individual or multi-packs – combos, Best of E-CuT sets, sets of accessories etc. are not included.

3. Collect loyalty You are automatically credited with one point for every registered E-C∪T saw blade.



B FEIN E-Cut saw blades of our choice.

4. Receive free

E-Cut blades.

Once you have

ollected 25 points,

ou receive a free pack of

If you have any further questions, Your specialist dealer will be happy to help:

DE: C. & E. Fein GmbH, Tel. +49 (0)7173 183-0, www.fein.de UK: FEIN Industrial Power Tools UK Ltd., Phone 01327 308730, www.fein-uk.co.uk



FEIN tool tips

Offers and new products for professional tradesmen.





New:

Cordless rotary hammer drill extremely light, compact and powerful.

Stainless steel processing - achieve even hette

New: Cordless angle and die grinder with innovative

PowerDrive motor.

Emission values (sound / vibration) can be found at www.fein.com/vibration

At a glance: all new products and promotional offers.

FEIN SELECT

Angle grinding

PROMOTION: Combine tools and

NEW: CCG cordless angle grinder

NEW: AGSZ cordless die grinder

batteries any way you want

FEIN accessories Stainless steel NEW: Drill chuck and hole saw adapter Tips for even better results P. 18 **Drilling** Oscillating P. 20 **NEW:** ABH 18 cordless Overview of tools P. 6 rotary hammer drill Overview of accessories P. 22 PROMOTION: Loyalty promotion Core drilling for saw blades P. 26 P. 12 KBB series core drills AKBU cordless magnetic core drill P. 14


P. 15

Unique, flexible and simple: the 18 V FEIN cordless range.

KBC 35 magnetic core drill

The FEIN cordless range provides powerful tools for the metalworking sector and oscillating multi-tools. They offer maximum power, endurance and a long service life.

Maximum power when combined with the FEIN HIGHPOWER storage battery!

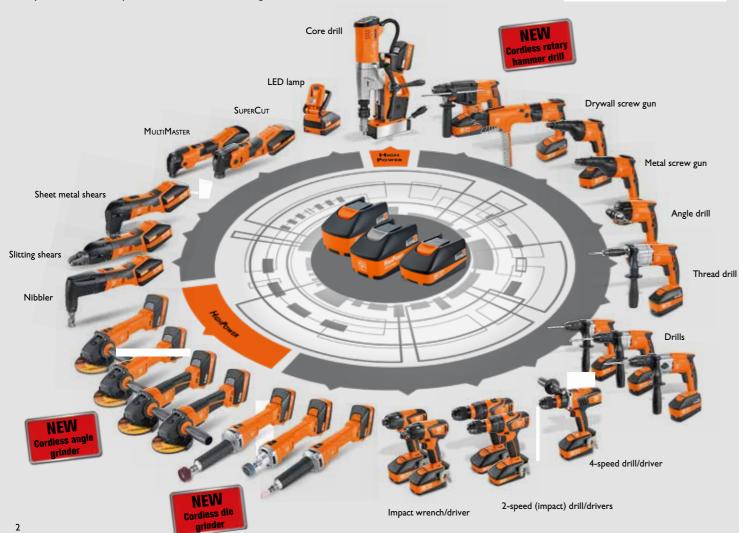

Enter the 18V FEIN cordless world right now and start enjoying benefits.



PROMOTION: 3 steps to a cordless future.

1. Buy products.

Buy FEIN products from the 18 V cordless range today. 2. Spend the required amount.

Achieve a total spend of £1000, £1500 or £2000 plus VAT and choose your free products.

3. Get free products.

Simply complete the voucher form and request your free products.

2 free products.

Products with a value of £2000 plus VAT and higher.

1 free product.

Products with a value of £1500 plus VAT and higher.



- 2-speed cordless drill/driver 2-speed cordless hammer drill/driver 4 Cordless impact wrench/driver (1/2" square head) 5 Cordless impact wrench/driver (1/4" hexagon socket) Cordless drill Cordless metal screw gun Cordless drywall screw gun O Cordless MULTIMASTER Battery starter set **Battery starter set**



4 free accessories.

Products with a value of £1000 plus VAT and higher.



Non-binding manufacturer's recommended price plus VAT.

FEIN QuickIN accessories are compatible with all FEIN cordless drill/drivers (ASCM 18 QM, ASCM 12 Q, ABS 18 Q, with QuickIN (MAX) interface. Find out more at www.fein.com/drills.

Combine products with FEIN SELECT* any way you want right now.

| | | (Impact) drill/driver | |
|--|--|---|--|
| Model | ASCM 18 QM | ABS 18 Q | ASB 18 Q |
| | 4-speed gearbox. Brushless motor. QuickIN MAX interface. | 2-speed gearbox. Brushless motor. QuicklN interface. | 2-speed gearbox wit impact function. Brushless motor. QuicklN interface. |
| Order no. for Select | 7 116 11 64 00 0 | 7 113 22 64 00 0 | 7 113 23 64 00 0 |
| RRP plus VAT | £206.00 | £174.00 | £190.00 |
| RRP including VAT | £247.20 | £208.80 | £228.00 |
| | Impact wrend | ch/driver | Metal screw gun |
| Model | ASCD 18-300 W2 | ASCD 18-200 W4 | ASCS 6.3 |
| | ➤ Brushless motor. ➤ Up to 290 Nm torque. | ► Brushless motor. ► Up to 290 Nm torque. | Brushless motor. Optimum speeds for self-drilling screws. |
| Order no. for SELECT | 7 115 06 64 00 0 | 7 115 07 64 00 0 | 7 113 11 63 00 0 |
| RRP plus VAT | £206.00 | £197.00 | £209.00 |
| RRP including VAT | £247.20 | £236.40 | £250.80 |
| THE RESERVE OF STREET | A CORNEL OF A STANCE OF THE COUNTY OF THE STANCE | Drills | TO THE CONTRACT OF THE PARTY OF |
| Model | ABOP 6 | ABOP 10 | ABOP 13-2 |
| | Drill up to 6 mm in steel. Brushless motor. | Drill up to 10 mm in steel. Brushless motor. | Drill up to 13 mm in steel. 2-speed gearbox (ABOP 13-2). Brushless motor. |
| Order no. for SELECT | 7 105 01 62 00 0 | 7 105 02 62 00 0 | 7 105 03 62 00 0 |
| RRP plus VAT | £209.00 | £209.00 | £250.00 |
| RRP including VAT | £250.80 | £250.80 | £300.00 |
| MENTAL SECTION AND CONTRACT OF STATE OF | Angle drill | Thread drill | Rotary hammer drill |
| Model | AWBP 10 | AGWP 10 | ABH 18 |
| | Extremely small. Drill up to 10 mm in steel. Brushless motor. | ▶ Up to M10 with reversing gear for automatic reversal of rotation direction. | Extremely light and compact design. High-power striking mechanism with 2 J. |
| Order no. for SELECT | 7 105 04 62 00 0 | 7 109 01 62 00 0 | 7 140 01 64 00 0 |
| RRP plus VAT | £258.00 | £323.00 | £274.00 |
| RRP including VAT | £309.60 | £387.60 | £328.80 |
| AND DESCRIPTION OF THE PROPERTY OF THE PROPERT | Drywall scr | ew gun | Angle grinder |
| Model | ASCT 18 M | ASCT 18 | CCG 18-115 BL |
| | Brushless motor. For all screwdriving applications in drywall construction. | Brushless motor. For all screwdriving applications in drywall construction. | With innovative PowerDrive motor. For 115 mm disc diameter. Ideal with HighPow |
| | ► Can also be used with collated strip magazine. | ► Can also be used with collated strip magazine. | battery. |
| | with collated strip magazine. 7 113 16 64 00 0 | collated strip magazine. 7 113 16 65 00 0 | 7 120 01 62 00 0 |
| Order no. for SELECT RRP plus VAT RRP including VAT | with collated strip magazine. 7 113 16 64 00 0 £297.00 | collated strip magazine. 7 113 16 65 00 0 £217.00 | 7 120 01 62 00 0 £241.00 |
| RRP plus VAT | with collated strip magazine. 7 113 16 64 00 0 | collated strip magazine. 7 113 16 65 00 0 £217.00 £260.40 | 7 120 01 62 00 0 |
| RRP plus VAT RRP including VAT | with collated strip magazine. 7 113 16 64 00 0 £297.00 £356.40 | collated strip magazine. 7 113 16 65 00 0 £217.00 £260.40 Angle grinder | 7 120 01 62 00 0 £241.00 £289.20 |
| RRP plus VAT RRP including VAT | with collated strip magazine. 7 113 16 64 00 0 £297.00 | collated strip magazine. 7 113 16 65 00 0 £217.00 £260.40 | 7 120 01 62 00 0 £241.00 £289.20 CCG 18-125 BLPD With innovative POWERDRIVE motor. For 125 mm disc die With dead man's switch. |
| RRP plus VAT RRP including VAT Model | with collated strip magazine. 7 113 16 64 00 0 £297.00 £356.40 CCG 18-115 BLPD With innovative POWERDRIVE motor. For 115 mm disc dia. With dead man's switch. Ideal with HIGHPOWER | collated strip magazine. 7 113 16 65 00 0 £217.00 £260.40 Angle grinder CCG 18-125 BL • With innovative POWERDRIVE motor. • For 125 mm disc diameter. • Ideal with HIGHPOWER | 7 120 01 62 00 0 £241.00 £289.20 CCG 18-125 BLPD With innovative PowerDrive motor. For 125 mm disc dia With dead man's switch. Ideal with HighPowi |
| | with collated strip magazine. 7 113 16 64 00 0 £297.00 £356.40 CCG 18-115 BLPD With innovative POWERDRIVE motor. For 115 mm disc dia. With dead man's switch. Ideal with HighPower storage battery. | collated strip magazine. 7 113 16 65 00 0 £217.00 £260.40 Angle grinder CCG 18-125 BL With innovative POWERDRIVE motor. For 125 mm disc diameter. Ideal with HIGHPOWER battery. | 7 120 01 62 00 0 £241.00 £289.20 CCG 18-125 BLPD With innovative PowerDrive motor. For 125 mm disc dia With dead man's switch. Ideal with HighPower storage battery. |
| RRP plus VAT RRP including VAT Model Order no. for Select | with collated strip magazine. 7 113 16 64 00 0 £297.00 £356.40 CCG 18-115 BLPD • With innovative POWERDRIVE motor. • For 115 mm disc dia. • With dead man's switch. • Ideal with HIGHPOWER storage battery. 7 120 03 62 00 0 | collated strip magazine. 7 113 16 65 00 0 £217.00 £260.40 Angle grinder CCG 18-125 BL > With innovative POWERDRIVE motor. > For 125 mm disc diameter. > Ideal with HIGHPOWER battery. 7 120 02 62 00 0 | 7 120 01 62 00 0 £241.00 £289.20 CCG 18-125 BLPD • With innovative PowerDrive motor. • For 125 mm disc dia • With dead man's switch. • Ideal with HighPowistorage battery. 7 120 04 62 00 0 |



FEIN cordless angle grinders with innovative PowerDrive motor. **Durable, powerful and robust.**

The new FEIN cordless angle grinder features a major advance in technology: the next generation of the brushless FEIN POWERDRIVE motor. At the very heart of the tool, this motor delivers impressive durability and a very long service life. The fully enclosed motor housing protects the motor from dirt and dust and renders additional protective measures on the tool unnecessary.





Ideal for various applications

Optimum speeds, matched to a large number of abrasive materials and other materials using the infinitely variable, electronic speed preselection.

Focus on user protection

Brake for rapidly bringing wheel to a stop. Restart protection protects against switching back on unintentionally. Overload protection for electronics and motor. Soft start to evenly and safely power up the tool.







The new heart of the tool: the innovative FEIN PowerDrivemotor.

- Very smooth running and low-vibration working thanks to motor being decoupled from the housing and mounted separately and four additional vibration dampers.
- Innovative cooling ribs for optimum heat dissipation, including monitoring of temperature in the motor's core to protect against overload.
- Quick-stop function without mechanical brake.
- ► Speed stability for significantly higher speed consistency at load compared to universal motors.
- ► Zero maintenance and little wear ensure long service life. No need to change carbon brushes.



| Technical data | | | | | | |
|------------------------------------|------|---------------------------|---------------------------------|---|----------------------------|--|
| Model | | CCG 18-115 BL | CCG 18-125 BL | CCG 18-115 BLPD | CCG 18-125 BLPD | |
| | | | | | | |
| Battery voltage | ٧ | | • | 18 | | |
| Battery capacity | Ah | | 5 | 5.2 | | |
| Battery compatibility | | | Li-ion/H _{IGH} | Power Li-ion* | | |
| Idling speed | rpm | | 2 500 | - 8 500 | | |
| Quick-clamping nut / flange | | M14 | | | | |
| Grinding / cutting wheel diameter | mm | 115 | 125 | 115 | 125 | |
| Elastic Sanding pad Ø | mm | 115 | 125 | 115 | 125 | |
| Brake, electronic | | Yes | | | | |
| Dead man's switch | | No | No | Yes | Yes | |
| Weight with storage battery (EPTA) |) kg | 2.7 | | | | |
| Order no. for SELECT | | 7 120 01 62 00 0 | 7 120 02 62 00 0 | 7 120 03 62 00 0 | 7 120 04 62 00 0 | |
| RRP plus VAT | | £241.00 | £241.00 | £241.00 | £241.00 | |
| RRP including VAT | | £289.20 | £289.20 | £289.20 | £289.20 | |
| Included in price | | 1 cordless angle grinder, | 1 safety hood, 1 quick-clamping | nut, 1 anti-vibration handle, 1 w | rench, 1 plastic tool case | |
| Order no. for SET | | 7 120 01 61 24 0 | 7 120 02 61 24 0 | 7 120 03 61 24 0 | 7 120 04 61 24 0 | |
| RRP plus VAT | | £435.00 | £435.00 | £435.00 | £435.00 | |
| RRP including VAT | | £522.00 | £522.00 | £522.00 | £522.00 | |
| Included in price | | | | нРоwer Li-ion), 1 ALG 50 rapid cl n handle, 1 wrench, 1 plastic tool | | |

The FEIN cordless die grinders: specialists in grinding, brushing, deburring and polishing.



New accessories for the FEIN cordless drill/ drivers with QuickIN and QuickIN MAX interface.

Work with even greater reliability with the new QuickIN accessories. Advanced technology from FEIN optimises processes and maximises results. The self-clamping drill chuck is compatible with all FEIN cordless drill/drivers with QuickIN MAX interface. The hole saw adapter is compatible with all tools with QuickIN/QuickIN MAX interfaces.





Compatible with all FEIN Li-ion batteries

thanks to MultiVolt interface.

Plunges a long way

into workpieces thanks to its long, slim neck.

Powerful, 30% higher efficiency

compared with universal motors with a rated output of 1100 W.

Ideal for various applications

Optimum speeds for applications in stainless steel and black steel, infinitely variable.

Very smooth running and low-vibration working

due to brushless, independently mounted housing, which is decoupled from the motor.

| Technical data | | | | | |
|---------------------------------------|-----|--|--|---|--|
| Model | | AGSZ 18-280 BL | AGSZ 18-280 LBL | AGSZ 18-90 LBL | |
| | | | | | |
| Battery voltage | ٧ | | 10 | 8 | |
| Battery capacity | Ah | | 5.0 | | |
| Battery compatibility | | | Li-ion/HIGHPOWER Li-ion | | |
| Idling speed | rpm | 9 000 - 28 000 2 900 - 9 000 | | | |
| Sanding wheel max. diameter | mm | 50 | | | |
| Max. collet diameter | mm | 8 | | | |
| Max. cutter diameter | mm | 12 | | | |
| Max. polisher diameter | mm | - | - | 80 | |
| Weight without storage battery (EPTA) | kg | 1.4 | 1.6 | 1.8 | |
| Order no. for SELECT | | 7 123 01 62 00 0 | 7 123 02 62 00 0 | 7 123 03 62 00 0 | |
| RRP plus VAT | | £190.00 | £206.00 | £222.00 | |
| RRP including VAT | | £228.00 | £247.20 | £266.40 | |
| Included in price | | 1 cordless die grinder, 1 collet (6 mm in diar | neter), 1 open-ended spanner (WAF 13), 1 ope | n-ended spanner (WAF 17), 1 plastic tool case | |
| Order no. for SET | | 7 123 01 61 00 0 | 7 123 02 61 00 0 | 7 123 03 61 00 0 | |
| RRP plus VAT | | £382.00 | £399.00 | £415.00 | |
| RRP including VAT | | £458.40 | £478.80 | £498.00 | |
| Included in price | | | s (Li-ion), 1 ALG 50 rapid charger, 1 collet (6 mm 1 open-ended spanner (WAF 17), 1 plastic tool ca | | |

SKE drill chuck



Drill chuck with automatic re-tensioning

- ▶ Prevents twist drills and threading drills from slipping.
- ► Clamping range 1.5 13 mm. High concentricity of up to 0.35 mm for precise working.
- ► Compatible with all FEIN cordless drill/drivers with QuickIN MAX interface.

| Order no. | 6 42 03 006 01 0 |
|--------------------------|------------------|
| LIST PRICE plus VAT | £91.67 |
| LIST PRICE including VAT | £110.00 |

Hole saw adapter



To drill large holes in metal

- ➤ Suitable for all FEIN carbide hole saws with QuickIN PLUS fitting. Perfectly suited to diameters of up to 40 mm.
- ► Supplied with pilot bit, without hole saw.
- Compatible with all FEIN cordless drill/drivers with QuickIN / QuickIN MAX interface.

| Order no. | 6 42 03 007 01 0 |
|--------------------------|------------------|
| LIST PRICE plus VAT | £80.07 |
| LIST PRICE including VAT | £66.72 |

Tip

Usage tips for hole saw adapter



- ▶ We recommend the ASCM 18 QM for the FEIN hole saw adapter:
- ► The 4-speed gearbox offers optimum cutting speeds for every diameter.
- ▶ Particularly fast drilling is possible in speed 2 at 800 rpm.
- ▶ Drilling in speed 1 at 400 rpm produces fewer vibrations.
- ➤ To protect the user, drill in torque stage 15 and use the additional handle.
- ► The adapter is compatible with drill bits and hole saws with a QuickIN PLUS fitting.
- ► Given the torques produced and the risk of injury from sudden blocking, we would recommend using hole saws with cordless drill/drivers only up to 40 mm.

Speed recommendations depending on hole diameter and material*

| D | Speed in rpm | | | | |
|------------------------------|--------------------|-----------------|--|--|--|
| Diameter in mm | Construction steel | Stainless steel | | | |
| 14 | 910-1360 | 450-1150 | | | |
| 15 | 850-1270 | 430-1070 | | | |
| 16 | 790-1200 | 400-1000 | | | |
| 17 | 750-1130 | 370-930 | | | |
| 18 | 710-1060 | 350-880 | | | |
| 19 | 670-1000 | 330-840 | | | |
| 20 | 630-950 | 320-800 | | | |
| 21 | 600-910 | 300-760 | | | |
| 22 | 580-870 | 290-720 | | | |
| 23 | 550-830 | 280-690 | | | |
| 24 | 530-800 | 270-660 | | | |
| 25 | 510-760 | 260-640 | | | |
| 26 | 490 - 740 | 250-610 | | | |
| 27 | 470 - 710 | 240-590 | | | |
| 28 | 455 - 680 | 230-570 | | | |
| 29 | 440-660 | 220-550 | | | |
| 30 | 425-635 | 210-530 | | | |
| 31 | 410-615 | 205 - 510 | | | |
| 32 | 400-600 | 200-500 | | | |
| 33 | 385-580 | 195 - 480 | | | |
| 34 | 375 - 560 | 185 - 470 | | | |
| 35 | 365 - 545 | 180-450 | | | |
| 36 | 355-530 | 175 - 440 | | | |
| 37 | 345 - 520 | 170-430 | | | |
| 38 | 335-505 | 170 - 420 | | | |
| 39 | 325-495 | 165 - 410 | | | |
| 40 | 320-480 | 160-400 | | | |
| Details refer to look around | | | | | |

*Details refer to load speeds

Extremely light, compact and powerful: the new FEIN cordless rotary hammer drill ABH 18.



motor, delivering high impact energy for continuous work progress. This allows holes with diameters of up to 20 mm to be drilled in

The cordless rotary hammer drill for universal working has a brushless concrete with ease – the work is comfortable and low-fatigue thanks to the compact design and low vibrations. Two forms of safety switchoff protect the user and tool.

Drilling dust nozzle for minimal dust.

The optional drilling dust nozzle protects the user against high dust levels. The nozzle securely adheres to all standard wall and ceiling surfaces. Compatible with all wet/dry dust extractors with a 35 mm suction hose.



Extremely light and compact design

weighing just 3.0 kg including battery (5 Ah).

Continuously high cutting speed

brushless motor.

High-power striking mechanism with 2 J. 80 holes with one battery charge (5 Ah).

Combination hammer with three functions:

hammer drilling, drilling and chiselling.



User protection

safety clutch stops the rotary hammer drill should the drill chuck jam.

Highlight

Technical data Model Battery voltage Battery compatibility Li-ion/HIGHPOWER Li-ion Brushless Motor Idling speed 0-1200 0-4400 Stroke rate 2.0 Impact energy SDS-plus Max. hole diameter in concrete mm Max, hole diameter in masonry mm 13 Max. hole diameter in steel Max. hole diameter in wood 22 Vibration from hammer drilling m/s² 12 in concrete Sound pressure level dB(A) Tool dimensions 303 x 80 x 207 2.3 Weight without battery 80 holes* Battery pack service life Scope of supply:

1 cordless rotary hammer drill, 1 handle, 1 depth stop, 1 plastic tool case

Order no. RRP plus VAT

RRP including VAT

FEIN battery starter set, see 14

7 140 01 64 00 0

£274.00

£328.80

* 10 x 75 mm at 5 Ah

A clean trio: rotary hammer drill, drilling dust nozzle and extractor.

Maximum clean working through the combination of cordless rotary hammer drill, drilling dust nozzle and DUSTEX extractor. Perfectly matched to one another, they provide optimum protection from dust and dirt.

FEIN DUSTEX 35 MX AC

The high-quality filter is automatically cleaned with the AutoClean system AC and extends the life of the flat fold filter for uninterrupted working. All M class dusts which are harmful to health are reliably extracted. The extraction of liquids is possible too. The FEIN DUSTEX 35 MX AC features a push bar, large wheels, 4 m suction hose and 7.5 m mains cable, giving it maximum agility.

| | Drilling dust nozzle | DUSTEX 35 MX AC |
|-------------------|----------------------|-----------------|
| Order no. | 9 26 02 101 01 0 | 9 20 32 060 |
| RRP plus VAT | £55.00 | £625.00 |
| RRP including VAT | £66.00 | £750.00 |

Discover FEIN DUSTEX system accessories at: www.fein.com

Typical potential applications



Hammer drill up to 20 mm in concrete.



Produce 68 mm socket holes in masonry.



Remove excess concrete.

discharge.



Core drilling expertise from the inventor of the power drill.

In 1895, FEIN invented the world's first electric hand drill, and in 1909, first electromagnetic drill GMAZ. The same spirit of innovation and German-built quality goes into every FEIN drill. With more than 120 years of ongoing development, FEIN has succeeded in perfecting metal drilling technology. Professionals put their trust in the long-life quality of FEIN and rightly so.

The benefits:

- ► First-class materials and excellent workmanship premium quality from one source.
- Performance and quality leader for drilling and core drilling.
- ➤ Tool, core drill bit and system accessories are precisely matched to one another – perfect for drilling in steel, stainless steel or aluminium.
- Two series cover all applications from core drilling and twist drilling to countersinking and tapping.

FEIN KBB series: Solid basic functionality – focused on core drilling applications.

With four different models, the FEIN KBB series includes the optimum tool for every workshop and installation application – from the compact FEIN KBB 30 for core drilling in tight and difficult-to-reach spots to the powerful 2-speed tool KBB 60 for use in the workshop. Every tool in the range is designed to be reliable and economical, delivering precise results.

The benefits:

Basic core drilling function.
Sturdy construction for tough applications.
Internal motor cable guide.

Optimised speed for use with HSS core drill bits.

KBB series – focused on core drilling applications.





KBB 30/KBE 30
Extremely compact for drilling on the construction site.



KBB 38
For precision drilling on the construction site.



KBB 40

Compact with fixed drill motor for work in tight spaces.



KBB 60 With 2-speed gearbox for drilling jobs in the workshop, cutting depth up to 75 mm.

| | KBB 30 / KBE 30 | KBB 38 | KBB 40 | KBB 60 |
|--|-----------------|------------|------------|------------|
| Core drilling in metal, up to 30 mm diameter | A A | A A | A A | A A |
| Core drilling in metal, up to 40 mm diameter | | | A A | A A |
| Core drilling in metal, up to 60 mm diameter | | | | A A |
| Use of HSS core drill | A A | A A | A A | A A |
| Use of carbide core drill | A | A | A | A |
| Working with one hand | A A | A A | A A | A A |
| Working overhead | A A | A A | A A | A |
| Installation work | A A | A A | A A | A |
| Workshop jobs | A A | A A | A A | A A |

▲ suitable **▲ ▲** very suitable

| | KBB 30 / KBE 30 | KBB 38 | KBB 40 | KBB 60 |
|-------------------|------------------|------------------|------------------|------------------|
| Order no. | 7 27 06 562 24 0 | 7 27 20 261 24 1 | 7 27 20 361 24 1 | 7 27 20 461 24 1 |
| RRP including VAT | £599.00 | £869.00 | £1159.00 | £1679.00 |

Cordless, flexible and versatile! Cordless FEIN AKBU magnetic core drill.



Benefits of use


- Continuously good work progress thanks to brushless FEIN PowerDrive motor and FEIN HIGHPOWER storage battery.
- ► Universal use thanks to forward/reverse running, electronic speed setting, MT2 tool mounting and 260 mm stroke range.
- ► Continuous mobile working thanks to FEIN HIGHPOWER storage battery.
- Easy tool positioning thanks to minimal weight and permanent magnet with magnetic bias.





So small, yet so powerful. The compact FEIN KBC 35 magnetic core drill.



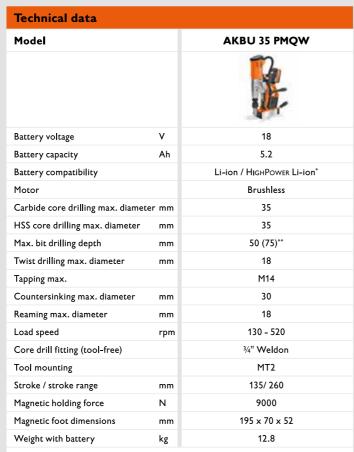

Scope of supply:

- 1 x cordless magnetic core drill, 2 x battery packs (HIGHPOWER Li-ion),
- 1 x ALG 50 rapid charger, 1 x coolant pump, 1 x safety strap, 1 x swarf hook,
- 1 x 105 mm centering pin, 1 x contact guard, 1 x drift key, 1 x case

| Order no. | 7 170 02 61 24 0 |
|-------------------|------------------|
| RRP plus VAT | £1328.00 |
| RRP including VAT | £1593.60 |

^{*} Outstanding performance with FEIN HIGHPOWER Li-ion battery ** With accessories as option

$\label{eq:FEIN Select tools} \textbf{FEIN Select tools without battery or charger}$

| Order no.7 | 170 02 62 00 0 |
|-------------------|----------------|
| RRP plus VAT | £1143.00 |
| RRP including VAT | £1371.60 |

HIGHPOWER battery starter set

FEIN SELECT+

2 x HighPower Li-ion batteries with ALG 50 rapid charger.



| Voltage | Capacity | Order number | RRP | RRP |
|---------|----------|------------------|----------|-----------|
| V | Ah | | plus VAT | incl. VAT |
| 18 | 5.2 | 9 26 04 311 01 0 | £320.52 | £384.62 |



Benefits of use

- Overall height of 169 mm provided by fixed drill motor for working in tight spaces.
- ► Universal use thanks to forward/reverse running, electronic speed setting and large installation space.
- Easy tool positioning as it weighs just 7.5 kg.
- ► Continuously good work progress thanks to high speed stability of the FEIN high-power motor with tacho electronics.



Scope of supply:

- 1 x magnetic core drill, 1 x 3/8" ratchet,
- 1 x 3/8" socket wrench extension, 1 x coolant pump, 1 x safety strap,
- 1 x swarf hook, 1 x 82 mm centering pin, 1 x contact guard, 1 x additional handle, 2 x hexagon socket (5 and 8 mm), 2 x hexagon socket with T-handle (5 and 8 mm),
- 1 x case

| Order no. | 7 272 15 61 00 0 |
|-------------------|------------------|
| RRP plus VAT | £934.00 |
| RRP including VAT | £1120.80 |

Unique: Tap drilling with a magnetic core drill with angled head.



Tapping drill set for through holes

Comprising 1 x M6 threading drill in accordance with DIN 352/ISO 13 with 34" Weldon adapter, 1 x HSS twist drill, 5 mm in diameter, with 34" Weldon fitting and 1 x HSS 90° countersink bit, 16.5 mm in diameter, with 34" Weldon adapter.

| | | LIST PRICE | LIST PRICE |
|--------|------------------|------------|------------|
| Thread | Order number | plus VAT | incl. VAT |
| M6 | 6 31 10 019 02 0 | £110.24 | £132.29 |



Tapping drill set for through holes

Comprising 1 x M8 threading drill in accordance with DIN 352/ISO 13 with 3/4" Weldon adapter, 1 x HSS twist drill, 6.8 mm in diameter, with 3/4" Weldon fitting and 1 x HSS 90° countersink bit, 16.5 mm in diameter, with 3/4" Weldon adapter.

| | | LIST PRICE | LIST PRICE |
|--------|------------------|------------|------------|
| Thread | Order number | plus VAT | incl. VAT |
| M8 | 6 31 10 020 02 0 | £110.24 | £132.29 |



Tapping drill set for through holes

Comprising 1 x M10 threading drill in accordance with DIN 352/ISO 13 with 34" Weldon adapter, 1 x HSS twist drill, 8.5 mm in diameter, with 34" Weldon fitting and 1 x HSS 90° countersink bit, 16.5 mm in diameter, with 34" Weldon adapter.

| | | LIST PRICE | LIST PRICE |
|--------|------------------|------------|------------|
| Thread | Order number | plus VAT | incl. VAT |
| M10 | 6 31 10 021 02 0 | £114.88 | £137.86 |



Tapping drill set for through holes

Comprising 1 x M12 threading drill in accordance with DIN 352/ISO 13 with 34" Weldon adapter, 1 x HSS twist drill, 10.2 mm in diameter, with 34" Weldon fitting and 1 x HSS 90° countersink bit, 16.5 mm in diameter, with 34" Weldon adapter.

| | | LIST PRICE | LIST PRICE |
|--------|------------------|------------|------------|
| Thread | Order number | plus VAT | incl. VAT |
| M12 | 6 31 10 022 02 0 | £114.88 | £137.86 |

Overcome every challenge: the versatile range of core drills from FEIN.



The FEIN core drills range includes the right tool for every job. From hand-guided to stationary core drilling, FEIN covers every metal drilling application with diameters of 0.5 mm to 80 mm and cutting depths of up to 75 mm. From the flexible hand-guided metal core drilling system with fast cutting speed to the magnetic core drills in the Economical, Compact, Universal and Automatic performance classes. We've got the right solution for every application, thanks to our extensive range of accessories.

Hand-guided core drilling Magnetic core drills system **Economical** Compact Universal Automatic Mobile Basic functionality for Flexibility for core Optimised size for use Versatility Maximum efficiency drilling in any material thanks to fully onfined or hard-tothanks to maximum functionality core and twist drilling and surface reach places automatic drill feed **FEIN AKBU 35** FEIN KBH 25 S FEIN KBE 30/KBB 30 FEIN KBC 35 **FEIN KBU 35 MQW** FEIN KBM 65 U FEIN KBM 50 auto **PMQW FEIN KBH 25-2 U KBE 35 FEIN KBU 35 QW** FEIN KBM 50 U FEIN KBM 80 U **FEIN KBM 80 auto** FEIN KBU 35-2 QW **KBB 38/40**

The FEIN core drill bits: specialists in their field.

Complete product range

Two quality levels: carbide and HSS. Core drill bit diameter of 12-80 mm.

Cutting depths of 25, 35, 50 and 75 mm. Mounting: QuickIN, 3/4" Weldon, M18.

Superior quality and tool life

Tough carbide teeth. M2 HSS steel containing 0.5% cobalt. Optimum cutting and clearanceangle. High concentricity.

Application know-how

HSS production since 1977. Carbide core drill bit range since 1984.

FEIN HM ULTRA core drill bit

faster core drilling than carbide competitors (21 seconds rather than 23 seconds)

longer tool life

than carbide competitors (420 holes rather than 315 holes)

FEIN HSS Nova core drill

faster core drilling than HSS competitors (23 seconds rather than 26 seconds)

longer tool life than HSS competitors (120 holes rather than 100 holes)

HM ULTRA 35 core drill bit with



Very long service life and outstanding cutting performance. Metric dimensions, cutting depth

| Diam- | Cutting depth 35 mm | |
|------------|---------------------|------------|
| eter mm | Order number | LIST PRICE |
| 12 | 6 31 27 086 01 9 | 53.90 |
| 13 | 6 31 27 087 01 3 | 53.90 |
| 14 | 6 31 27 088 01 1 | 53.90 |
| 15 | 6 31 27 089 01 5 | 53.90 |
| 16 | 6 31 27 090 01 7 | 53.90 |
| 17 | 6 31 27 091 01 6 | 53.90 |
| 18 | 6 31 27 092 01 9 | 53.90 |
| 19 | 6 31 27 093 01 3 | 53.90 |
| 20 | 6 31 27 094 01 1 | 53.90 |
| 21 | 6 31 27 095 01 5 | 53.90 |
| 22 | 6 31 27 096 01 8 | 53.90 |
| 23 | 6 31 27 097 01 2 | 53.90 |
| 24 | 6 31 27 098 01 0 | 53.90 |
| 25 | 6 31 27 099 01 4 | 53.90 |
| 26 | 6 31 27 100 01 5 | 53.90 |
| 27 | 6 31 27 101 01 4 | 53.90 |
| 28 | 6 31 27 102 01 7 | 53.90 |
| 29 | 6 31 27 103 01 1 | 60.48 |
| 30 | 6 31 27 104 01 9 | 62.07 |
| 31 | 6 31 27 105 01 3 | 62.07 |
| 32 | 6 31 27 106 01 6 | 62.07 |
| 33 | 6 31 27 107 01 0 | 62.07 |
| 34 | 6 31 27 108 01 8 | 62.07 |
| 35 | 6 31 27 109 01 2 | 62.07 |

HM ULTRA 35 core drill bit with " Weldon fitting



Very long service life and outstanding cutting performance. Metric dimensions, cutting depth

| epth 35 mm | | Diam | - Cutting depth 35 mm | |
|------------|------------|------------|-----------------------|------------|
| number | LIST PRICE | eter mm | Order number | LIST PRICE |
| 086 01 9 | 53.90 | 12 | 6 31 27 714 01 0 | 48.43 |
| 087 01 3 | 53.90 | 13 | 6 31 27 715 01 0 | 48.43 |
| 088 01 1 | 53.90 | 14 | 6 31 27 716 01 0 | 48.39 |
| 089 01 5 | 53.90 | 15 | 6 31 27 717 01 0 | 48.43 |
| 090 01 7 | 53.90 | 16 | 6 31 27 718 01 0 | 48.43 |
| 091 01 6 | 53.90 | 17 | 6 31 27 719 01 0 | 48.43 |
| 092 01 9 | 53.90 | 18 | 6 31 27 720 01 0 | 48.39 |
| 093 01 3 | 53.90 | 19 | 6 31 27 721 01 0 | 48.43 |
| 094 01 1 | 53.90 | 20 | 6 31 27 722 01 0 | 48.43 |
| 095 01 5 | 53.90 | 21 | 6 31 27 723 01 0 | 48.43 |
| 096 01 8 | 53.90 | 22 | 6 31 27 724 01 0 | 48.43 |
| 097 01 2 | 53.90 | 23 | 6 31 27 725 01 0 | 48.43 |
| 098 01 0 | 53.90 | 24 | 6 31 27 726 01 0 | 48.43 |
| 099 01 4 | 53.90 | 25 | 6 31 27 727 01 0 | 48.43 |
| 100 01 5 | 53.90 | 26 | 6 31 27 728 01 0 | 48.43 |
| 101 01 4 | 53.90 | 27 | 6 31 27 729 01 0 | 48.43 |
| 102 01 7 | 53.90 | 28 | 6 31 27 730 01 0 | 48.43 |
| 103 01 1 | 60.48 | 29 | 6 31 27 731 01 0 | 55.72 |
| 104 01 9 | 62.07 | 30 | 6 31 27 732 01 0 | 55.72 |
| 105 01 3 | 62.07 | 31 | 6 31 27 733 01 0 | 55.72 |
| 106 01 6 | 62.07 | 32 | 6 31 27 734 01 0 | 55.72 |
| 107 01 0 | 62.07 | 33 | 6 31 27 735 01 0 | 55.72 |
| 108 01 8 | 62.07 | 34 | 6 31 27 736 01 0 | 55.72 |
| 109 01 2 | 62.07 | 35 | 6 31 27 737 01 0 | 55.72 |
| | | | | |

HM ULTRA 50 core drill bit with " Weldon fitting



Very long service life and outstanding cutting performance. Metric dimensions, cutting depth

| Diam- | Cutting depth 50 mm | |
|-------|---------------------|------------|
| mm | Order number | LIST PRICE |
| 12 | 6 31 27 276 01 0 | 56.72 |
| 13 | 6 31 27 277 01 0 | 56.72 |
| 14 | 6 31 27 278 01 0 | 56.72 |
| 15 | 6 31 27 279 01 0 | 56.72 |
| 16 | 6 31 27 280 01 0 | 56.72 |
| 17 | 6 31 27 281 01 0 | 56.72 |
| 18 | 6 31 27 282 01 0 | 56.72 |
| 19 | 6 31 27 283 01 0 | 56.72 |
| 20 | 6 31 27 284 01 0 | 56.72 |
| 21 | 6 31 27 285 01 0 | 56.72 |
| 22 | 6 31 27 286 01 0 | 56.72 |
| 23 | 6 31 27 287 01 0 | 56.72 |
| 24 | 6 31 27 288 01 0 | 56.72 |
| 25 | 6 31 27 289 01 0 | 56.72 |
| 26 | 6 31 27 290 01 0 | 56.72 |
| 27 | 6 31 27 291 01 0 | 56.72 |
| 28 | 6 31 27 292 01 0 | 56.72 |
| 29 | 6 31 27 293 01 0 | 56.72 |
| 30 | 6 31 27 294 01 0 | 56.72 |
| 31 | 6 31 27 295 01 0 | 63.40 |
| 32 | 6 31 27 296 01 0 | 63.40 |
| 33 | 6 31 27 297 01 0 | 63.40 |
| 34 | 6 31 27 298 01 0 | 63.40 |
| 35 | 6 31 27 299 01 0 | 63.40 |

HSS Nova 25 core drill bit with



Long service life. Metric dimensions, cutting depth 25 mm.

| Diam- | Cutting depth 25 mm | |
|------------|---------------------|------------|
| eter mm | Order number | LIST PRICE |
| 12 | 6 31 33 119 05 1 | 20.93 |
| 13 | 6 31 33 129 05 1 | 19.33 |
| 14 | 6 31 33 140 05 1 | 20.93 |
| 15 | 6 31 33 150 05 1 | 19.33 |
| 16 | 6 31 33 159 05 1 | 20.93 |
| 17 | 6 31 33 170 05 1 | 22.84 |
| 18 | 6 31 33 180 05 1 | 22.84 |
| 19 | 6 31 33 189 05 1 | 22.22 |
| 20 | 6 31 33 199 06 3 | 26.64 |
| 21 | 6 31 33 210 05 1 | 26.64 |
| 22 | 6 31 33 219 05 1 | 26.64 |
| 23 | 6 31 33 229 05 1 | 28.15 |
| 24 | 6 31 33 240 05 1 | 29.65 |
| 25 | 6 31 33 250 05 1 | 30.44 |
| 26 | 6 31 33 259 05 1 | 34.58 |
| 27 | 6 31 33 270 05 1 | 34.58 |
| 28 | 6 31 33 279 05 1 | 37.05 |
| 29 | 6 31 33 289 05 1 | 37.05 |
| 30 | 6 31 33 299 05 1 | 37.48 |
| 31 | 6 31 33 309 05 1 | 39.52 |
| 32 | 6 31 33 319 05 1 | 43.34 |
| 33 | 6 31 33 329 05 1 | 45.56 |
| 34 | 6 31 33 339 05 1 | 51.84 |
| 35 | 6 31 33 350 05 1 | 51.84 |

HSS Nova 50 core drill bit with



Long service life. Metric dimensions, cutting

| depth 5 | 0 mm. | |
|------------|---------------------|------------|
| Diam- | Cutting depth 50 mm | |
| eter mm | Order number | LIST PRICE |
| 12 | 6 31 33 119 05 2 | 29.34 |
| 13 | 6 31 33 129 05 2 | 29.34 |
| 14 | 6 31 33 140 05 2 | 29.34 |
| 15 | 6 31 33 150 05 2 | 28.59 |
| 16 | 6 31 33 159 05 2 | 29.34 |
| 17 | 6 31 33 170 05 2 | 31.18 |
| 18 | 6 31 33 180 05 2 | 32.02 |
| 19 | 6 31 33 189 05 2 | 31.18 |
| 20 | 6 31 33 199 05 2 | 34.52 |
| 21 | 6 31 33 210 05 2 | 36.40 |
| 22 | 6 31 33 219 05 2 | 37.36 |
| 23 | 6 31 33 229 05 2 | 34.52 |
| 24 | 6 31 33 240 05 2 | 39.00 |
| 25 | 6 31 33 250 05 2 | 44.20 |
| 26 | 6 31 33 259 05 2 | 45.39 |
| 27 | 6 31 33 270 05 2 | 41.92 |
| 28 | 6 31 33 279 05 2 | 51.98 |
| 29 | 6 31 33 289 05 2 | 51.98 |
| 30 | 6 31 33 299 05 2 | 51.98 |
| 31 | 6 31 33 309 05 2 | 58.49 |
| 32 | 6 31 33 319 05 2 | 58.49 |
| 33 | 6 31 33 329 05 2 | 66.30 |
| 34 | 6 31 33 339 05 2 | 61.67 |
| 35 | 6 31 33 350 05 2 | 65.00 |
| | | |

HSS Nova 25 core drill bit with Weldon fitting



Long service life. Metric dimensions, cutting depth 25 mm.

| Diam- | Cutting depth 25 mm | |
|------------|---------------------|------------|
| eter mm | Order number | LIST PRICE |
| 12 | 6 31 34 120 05 1 | 20.93 |
| 13 | 6 31 34 130 05 1 | 19.33 |
| 14 | 6 31 34 140 05 1 | 20.93 |
| 15 | 6 31 34 150 05 1 | 19.33 |
| 16 | 6 31 34 160 05 1 | 20.93 |
| 17 | 6 31 34 170 05 1 | 22.84 |
| 18 | 6 31 34 180 05 1 | 22.84 |
| 19 | 6 31 34 190 05 1 | 21.06 |
| 20 | 6 31 34 200 05 1 | 26.64 |
| 21 | 6 31 34 210 05 1 | 26.64 |
| 22 | 6 31 34 220 05 1 | 26.64 |
| 23 | 6 31 34 230 05 1 | 28.15 |
| 24 | 6 31 34 240 05 1 | 30.44 |
| 25 | 6 31 34 250 05 1 | 30.44 |
| 26 | 6 31 34 260 05 1 | 35.53 |
| 27 | 6 31 34 270 05 1 | 37.82 |
| 28 | 6 31 34 280 05 1 | 38.03 |
| 29 | 6 31 34 290 05 1 | 35.14 |
| 30 | 6 31 34 300 05 1 | 40.57 |
| 31 | 6 31 34 310 05 1 | 37.48 |
| 32 | 6 31 34 320 05 1 | 46.92 |
| 33 | 6 31 34 330 05 1 | 43.34 |
| 34 | 6 31 34 340 05 1 | 49.18 |
| 35 | 6 31 34 350 05 1 | 49.18 |

Stainless steel processing. Achieve even better results.

With the right application, the right tool and the perfect approach, you can optimise your results. Removing welded seams or producing a mirror polish on surfaces: now you can achieve even better results with the following tips.





Job and material



Removing welded seams

without damaging adjacent surfaces – depending on the thickness of the welded seam, rough, medium or soft flap sanding discs can be selected.

Tool: WSG 17-70 INOX **Accessories:** Rough flap sanding disc

Initial situation



Welded seam on profiles or edges



Application

Removal of the welded seam without damaging the adjacent surface



Result

Outstanding surface without rework


TIP 2

Grinding welded fillet welds

with a new grinding disc and achieving a good sanding capacity

Tool: KS 10-38 E SET fillet weld grinder

Accessories: Grinding disc 6373



Unmachined welded seams with tarnishing in metal constructions



Grind the welded seams in hard-to-access constructions



Even-looking surface and reliable removal of tarnishing on fillet welds



Preparing surfaces and profiling to a satin finish

or polishing to a mirror finish.

Tool: WPO 14-25 E

Accessories: SET sanding sleeves and

Pyramix K280, K400, K600, K1400 sanding sleeves



Remove scale and scratches from surface



Surface desired before satin-finishing



Further machining of the surface with K400, K800 and K1400, preparation for polishing



Mirror polish on surfaces and profiles

just a few steps to produce a gloss finish.

Tool: WPO 14-25 E

Accessories: Medium lamella rollers, pre-

polishing paste and colouring

paste



Surface pre-sanded to K1400, all scratches must



After applying the pre-polishing paste, produce mirror polish on the surface



After processing with the colouring paste, optimum mirror polish on stainless steel surfaces



Producing a satin finish

on mitre joints to visually even out the

Tool: WPO 14-25 E

Accessories: Masking tape, finishing roller



Satin finish without affecting the mitre joints



Cover and visually blend in the mitre joint when satin-finishing



Clean grinding pattern in the mitre joint right up to the edge

FEIN oscillating multi-tool range: the right combination of tool and accessories for all requirements.



We don't consider tools and accessories as stand-alone elements.

One cannot achieve its full potential without the other. So we developed a system that ideally combines their strengths. Firstly, our powerful oscillating multi-tools are available as mains- or battery-operated versions. Each product comes with individual benefits, which are essential for efficient, reliable and safe working.

Secondly you will find the most extensive range of accessories on the market, opening up an incredibly wide range of use. Together, they provide outstanding precision, maximum comfort, the best work progress and a perfect result. In a nutshell: this system always provides exactly the right solution for thousands of professional jobs.

| FEIN MULTITALENT | The gateway to the professional class. The economical alternative for anyone who cannot afford to compromise on quality and performance, but is not so concerned with maximum operating comfort. SPEED CLASS | 250 W 12 V 2 x 1.6° | FEIN MULTITALENT STARLOCK STARLOCK PLUS Stroke = 4.3 mm | Battery-powered Mains-powered | RRP plus VAT": £123.95 110V 7 229 54 61 24 1 RRP plus VAT": £123.95 | QUICKSTART 230V 7 229 53 61 24 0 RRP plus VAT': £163.95 110V 7 229 53 61 24 1 RRP plus VAT': £163.95 AFMT 12 QSL 7 129 25 61 24 0 RRP plus VAT': £197.95 | AFMT 12 QSL Steet* 7 129 25 62 00 0 | | | Service of the servic | |
|---------------------|---|---------------------------|---|-------------------------------|---|--|---|--|---|--|---------|
| FEIN MULTIMASTER | the benchmark amongst oscillating multi-tools. Trusted by professionals the world over and the first choice for universal use in interior work and renovation, delivering exemplary quality. SPEEDCLASS | 350 W 18 V 2 x 1.7° | FEIN MULTIMASTER STARLOCK STARLOCK PLUS Stroke = 5.3 mm | Battery-powered Mains-powered | RRP plus VAT: £201.95 110V 7 229 52 62 24 1 RRP plus VAT: £201.95 | Top 230V 7 229 52 61 24 0 RRP plus VAT': £241.95 110V 7 229 52 61 24 1 RRP plus VAT': £241.95 AFMM 18 QSL Select' 7 129 22 62 00 0 RRP plus VAT': £144.95 | | | | You will find minformation aboundividual FEIN www.fein.com. | sets at |
| FEIN SuperCut | The most powerful system. For special applications too. Indispensable in industries requiring special accessories for particular solutions and maximum performance and service life. The FEIN SUPERCUT can be combined with all FEIN's accessories. | 450 W 18 V 2 x 2.0° | FEIN SUPERCUT STARLOCK STARLOCK PLUS STARLOCK MAX Stroke = 7.2 mm | Battery-powered Mains-powered | RRP plus VAT*: £345.95 110V 7 229 46 61 24 1 | 230V 7 229 46 62 24 0 RRP plus VAT: £429.95 110V 7 229 46 62 24 1 RRP plus VAT: £429.95 AFSC 18 SELECT 7 129 27 60 00 0 RRP plus VAT: £200.95 | 110V 7 229 46 64 24 1 RRP plus VAT: 429.95 Interior work Wood 7 129 27 64 24 0 | Window repairs / replacement 7 129 27 66 00 0 | Tile restoration / bathroom renovation 7 129 27 67 00 0 RRP plus VAT: £499.95 | 7 129 27 68 00 0 | |

^{*}Non-binding manufacturer's recommended price plus VAT in £.

We have the right saw blade for your very specific application.

FEIN genuine accessories for sawing set standards. They provide solutions to applications for which there are no equivalent alternatives and deliver maximum precision even in the most challenging of applications. The unique accessories permit sawing flush with the

surface and also simple plunging into solid material. The accessories can be clamped in 12 different positions around the oscillator's tool axis, delivering the best performance even in tight spaces.

| SELECTION CRITERIA FOR E-CUT SAW BLADES | | | | |
|---|----------------|--|---|------------|
| | | Area of application | Teeth | |
| Standard | | All wood, plasterboard and plastic materials | set | |
| Standard curved | | As Standard but with curved cutting geometry for optimum plunging and clean precise cut edges, especially on smooth surfaces | set radius | curved HCS |
| Long-life | WOOD | All wood, plasterboard and plastic materials. Extremely robust HSS teeth, also resilient to nails in wood (up to approx. diameter 4 mm), masonry etc. | set bimetal/HSS | 7-418573 |
| Precision | | All wood materials, plasterboard and soft plastics. | double row of JAPAN teeth | |
| Precision BiM | | As Precision, but with HSS teeth for longer service life and greater robustness | double row of JAPAN teeth bimetal/HSS | |
| Universal | WOOD/ METAL | Wood, plasterboard, plastics and sheet metal up to 2 mm, aluminium profiles and Cu pipes. Incredibly robust HSS teeth. | corrugated bimetal/HSS | |
| Fine | METAL | Thin cuts that can be controlled with ease in sheet metal up to 2 mm, aluminium profiles, Cu pipes; also for fibreglass-reinforced plastic and other hard plastics. Incredibly robust HSS teeth. | fine tooth bimetal/HSS | |

Backing pads Plastic carrier material for preventing damage and marks on the workpiece, hook and loop fastening.

Super-soft version

sheets for machining

aluminium rims.

Flat version for very Standard version. perforated or narrow, flat openings unperforated. STARLOCK

Corundum abrasive grit fully bonded with Super-soft sanding















Corundum abrasive | Corundum abrasive grit fully

with artificial resins universal use on virtually all

bonded with artificial resins for



Finger shape for use in very Large sanding pads (edge length 130 mm) for fast and efficient sanding. The alternative to eccentric or random sanders. High sanding capacity, universally suitable for corners and edges as well as large surfaces.




profile inserts and









Zirconium sanding sheets for Corundum abrasive

Professional

sanding set

For sanding in grooves

includes 6 different

and on outside radii. Set

CLEANING AND POLISHING

Bristle fleece For cleaning boat decks or cleaning / polishing anti-slip structures

Abrasive material

virtually all materials.

artificial resins for universal use on





Felt polishing pad Felt polishing pad for polishing boat decks (gelcoat), chrome, stainless steel, aluminium, copper and copper alloys.



grit fully bonded

for universal use.

Felt polishing pad For polishing up metal parts, and for polishing and decorative polishing of stone and stone products. Plastic carrier plate prevents damage and marks on the





Sanding sheets, foam backing With foam lamination for removing scratches from paintwork, gelcoat, acrylic and polycarbonate glazing, lacquers, wood with a clear lacquer, furniture and many more besides.



SAWS

E-Cut standard saw blade

134

E-Cut precision saw blade #####

Outstanding work progress and maximum precision.

Set teeth for all wood, plasterboard and plastic materials, high cutting

Double-row Japan teeth for all wooden materials, plasterboard and soft plastics.



WOOD

WOOD

METAL

E-C∪T fine saw blade

aluminium profiles, copper pipes. Also for

particularly thin cutting line.

COMPOSITE

Carbide saw blade

187

Carbide - the cost-effective alternative.

Bimetal with fine HSS teeth for sheet metal up to 2 mm,

Extremely precise cuts which are very easy to control with


STARLOC

fibreglass-reinforced plastic and other hard plastics.

346



Bimetal with set HSS wood teeth for all wood, plasterboard and plastic materials. Outstanding tool life, high cutting quality and speed. Extremely robust, also resilient to nails in wood, masonry etc.



E-Cut precision BiM saw blade

E-Cut long-life saw blade

183







Bimetal with double-row HSS Japan teeth for all wooden materials, plasterboard and soft





Bimetal with corrugated HSS universal teeth. Wide range

of applications for sheet metal up to 2 mm, aluminium

229

205

E-C∪T Curved HCS HSS saw blade Bimetal for long tool life. Set HSS wood teeth. Outstand-Set teeth for all wood, plasterboard and plastic materials ing tool life, high cutting quality and speed. As "mini circuhigh cutting quality and speed. Curved cutting geometry lar saw", ideal for long, straight cuts and for making cutfor optimum plunging. outs in laid parquet, laminate and wall panelling.

199





HSS saw blade

with the surface.

Diamond saw blade

Bimetal for long tool life. HSS metal teeth for sheet metal

up to approx. 1 mm. Also for plastics, fibreglass-reinforced

plastic, wood, putty and copper/copper alloys. Work flush

profiles, copper pipes, wood, plasterboard and plastics. 222 223





HSS saw blade

Solid HSS with metal teeth for sheet metal up to approx. 1 mm. Also for plastics, fibreglass-reinforced plastic, wood, putty and copper/copper alloys. Outstanding cutting speed. Clean, thin cutting line.



SPECIAL MATERIAL

Gentle sawing with perfect, clean cut edges in carbon fibre-reinforced plastic/fibreglass-reinforced plastic materials without delamination. Precise working into corners and on edges or for long, straight cuts with high cutting speed and precision. Diamond - outstanding durability, for demanding tasks.



Saw blade For all soft materials. Segmentand on edges without overcut-



Segment saw blade ed, ideal for working in corners For cutting out putty-mounted



CUTTING AND SCRAPING

SPECIAL MATERIAL

Stopper knife

For removing stubborn old paint, adhesive residue, carpets, tile adhesives and coats of underseal as well as silicone or acrylic joints in sanitary facilities.



STARLOCK PLUS





STARLOCK



STARLOCK PLUS

For cutting out panelled

deck sealant materials

safely and at speed.



Can be used

universally for



coated for



Long blade for very

STARLOCK MAX

deep joints.

SPECIAL MATERIAL



E-C∪T multi-function knife

With three cutting surfaces for cutting carpet, PVC floors, cardboard, bitumen shingles and roofing fabric.





CUTTING AND FILING

GROUT

Carbide rasp For rough sanding of fillers, tile adhesive, concrete, stone and wood







Tile joint cleaner

Carbide file For deburring and filing of CFRP / For quick cost-effective cleaning of heavily fibreglass-reinforced plastic materials, plastics and wood.

SPECIAL MATERIAL



For making grooves in rigid foam panels for electrical, wall and underfloor heating.

Cutting tool





GROUT

Carbide saw blade

For cutting out damaged tile joints. Also cuts grooves in plaster, porous concrete and similar construction materials.

| | | | CK | STARLO |
|---|---|---|------|--------|
| 商 | | | | |
| | (|) | (F)- | |

125

Segmented, ideal for working in corners and on edges without overcutting.









GROUT

118

Diamond saw blade

For cutting out damaged marble, epoxy resin and trass joints. Excellent service life. Also suitable for very hard epoxy resin or cement joints. Segmented, ideal for working in corners and on edges without overcutting. Round shape for long cuts, maximum usage





Segmented, ideal for partial repairs in corners and on edges without overcutting.

