► INTERIOR CONSTRUCTION

FEIN. Unverwüstliche Elektrowerkzeuge.



The best oscillating power tools. Since 1967 and in the future.

No. 1 in interior construction and renovation.



"I won't work with anything except the Original"

Josche Frankenberger, prop builder and furniture designer

Learn more at: www.fein.com/original

The oscillating power tool system

The Original	P. 3
The system	P. 4
Starlock tool mount	P. 5
Anti-vibration system	P. 6
The FEIN oscillator product range	P. 8
FEIN MULTITALENT	P. 10
FEIN MULTIMASTER	P. 14
FEIN SUPERCUT CONSTRUCTION	P. 22

FEIN accessories	P. 28
Sawing accessories	P. 30
Sanding accessories	P. 36
Removing grout and rasping accessories	P. 42
Cutting, scraping accessories	P. 46
Cleaning, polishing accessories	P. 48
Combo offers	P. 50
General Accessories	P. 51

A brilliant idea, continually improved. The birth of the Original.

In 1967, we invented the oscillating power tool. By now, we have consistently further developed the machines and accessories for almost 50 years. So today we can offer the most comprehensive system on the market for interior construction and renovation. Numerous patents, such as the one for vibration decoupling, testify to our unique expertise in the production of power tools.

With the zww Starlock tool mount, we are No. 1 in the oscillating power tool field – and continue to set standards.



GERMANY



How does the tool become an Original?

For over 150 years, FEIN's success has been characterized by one clear principle: We understand our customers' daily challenges and respond by developing application solutions that make work faster, easier and safer.

The first Original: The 1967 FEIN saw with oscillating saw blade.



Striving to make enduring power tools - Made in Germany - remains our focus. And when these products are trusted millions of times throughout the world over the decades and this trust is justified in every situation - Originals emerge.







The best machines. The best accessories. Success with a system.

We do not view machines and accessories as separate elements. One cannot achieve peak performance without the other. That is why we have developed a system that combines their strengths perfectly. On one hand, they're our high-performance oscillating power tools, and, on the other, the most extensive range of accessories on the market, which opens up an exceptional range of applications. The interface of this system provides outstanding precision, maximum convenience, exceptional cutting speed, and perfect results. In short: it always provides exactly the right solution for thousands of professional applications.





The benefits of FEIN machines:

- Developed and built for maximum performance and extreme adaptability.
- Largest product range on the market in powerful corded and cordless models.
- Numerous patented product features such as the anti-vibration system.

The benefits of FEIN original accessories:

- Largest accessory range on the market in all 3 Starlock performance classes. The standard for oscillating power tools.
- Outstanding FEIN quality for unrivaled service life, maximum cutting speed, and perfect results.
- Numerous exclusive FEIN accessories for unique application solutions.

Optimum Functionality

Fastest Cutting Speed

Perfect Results Quality Made in Germany

Starlock: The industry standard tool mounting for oscillating power tools.

Experience the technology at: www.fein.com/original

- ► Fast, secure and convenient tool change in less than 3 seconds.
- 100% power transfer due to the stainless steel 3D tool mount for fastest cutting speed.
- Precise results due to extremely rigid FEIN original accessories.





Simply position the accessory in the Starlock mount and snap into place.





To release, lift the locking lever.



Eject the accessory and done!

Starlock. Sometimes the details make the difference. Like Starlock, the innovative tool mount, it enables an accessory change in only 3 seconds. At the same time, it guarantees perfect accessory fitting and therefore maximum power transfer. The result: even faster work performance in every application.

Innovative and unique: the FEIN Patented Anti-Vibration System.



On one hand, the anti-vibration system of FEIN oscillating power tools reduces vibration and operating noise by decoupling the housing and motor, which makes operation safe and comforatable. On the other hand, the Starlock accessory mounting system results in the motor output reaching the accessory without loss. So the cutting speed is maximized, while minimizing user stress at the same time.

Only from FEIN:

- Housing completely independent of the motor, due to flexible damping elements.
- Effective vibration reduction for minimal physical stress and safe operation – even in continuous use.
- Outstanding noise damping.
 Comfortable operation for you and your environment.



UP TO **70%**

In most cases, only vibration class 1 is reached, depending on application and accessory used. So work can continue up to eight times longer before the permissible daily limit for vibration stress in Germany and most EU countries is reached.

UP TO **50%**

Noise may cause health risks. The FEIN anti-vibration system reduced the sound pressure from FEIN oscillating power tools* by almost 50%. This affects both the user and his or her environment to the same extent during extended operation such as sanding or renovation work. UP TO **35**% faster cutting speed

The FEIN oscillating power tools saw up to 35% faster than their predecessors. With their already impressive capabilities, FEIN oscillating power tools with Starlock accessory mount and anti-vibration system are the perfect answer to thousands of professionals.

* Sound pressure measured with the machine running at maximum speed without accessory

The right tool for every application. The innovative FEIN oscillating power tools.



The FEIN oscillating power tool product range offers professional users a powerful system. It consists of FEIN power tools that have proven themselves millions of times and the matching original accessories for challenges in interior construction and renovation. Uncompromising FEIN quality, unrivaled capabilities and the system's extremely extensive accessory range cover every need.

FEIN MULTITALENT The best entry into the professional class.

The economical alternative for everyone who insists on quality and performance, but places less value on maximum operating convenience.

FEIN MULTIMASTER The standard of oscillating power tool excellence.

Proven by professionals around the world and first choice for universal use in interior construction and renovation, in impecable quality.

350W/18V

STARLOCK PLUS

Suitable for Starlock and StarlockPlus accessories.

ANTI-VIBRATION

250W/12V

STARLOCK PLUS

Suitable for Starlock and StarlockPlus accessories.

ANTI-VIBRATION*

* for cordless MULTITALENT AFMT 12 QSL



FEIN SUPERCUT The highest performance system for special applications.

Indispensable in industries that require special accessories for specific application solutions as well as maximum power and service life. The FEIN SUPERCUT is compatible with the complete range of FEIN accessories.

Order directly at: www.fein.com/original

Your benefits:

- Almost 50 years of experience with oscillation technology.
- The high "Made in Germany" quality you expect.
- Unrivaled performance and versatility.
- FEIN original accessories for perfect results and maximum tool life.

450 W / 18 V

STARLOCK MAX

Suitable for Starlock, StarlockPlus and StarlockMax accessories.

ANTI-VIBRATION

The FEIN MULTITALENT. The best entry into the professional class.

The FEIN MultiTalent is the first choice for everyone who is looking for an economical professional tool with an ideal price/performance ratio, but is unwilling to make any compromises in quality or performance. This universal tool system for interior construction and renovation provides almost total access to the Starlock and StarlockPlus accessory range. With its wide selection of original accessories, it sets standards for all oscillating tools on the market.

MULTI



Your benefits with the FEIN MULTITALENT:

- ► StarlockPlus tool mount. Perfect accessory fitting due to stainless steel 3D mount. 100% power transfer for up to 35% faster cutting speed and increased precision.
- QuickIN. Patented, tool-free, FEIN rapid-clamping system. Fastest accessory change – under 3 seconds – in conjunction with Starlock. Secure and convenient.
- Metal drive head. High load capacity and maximum service life. All gearbox parts are metal.
- Corded and cordless model. Almost identical power with every FEIN MULTITALENT.



Suitable for Starlock and StarlockPlus accessories.

250 W

FMT 250 QSL benefits:

111

- High-performance motor. Durable, overload-proof motor with high copper content for maximum power.
 Extremely smooth-running due to ball bearings at each end.
 Barrel design for maximum stability.
- Industrial-strength cable. Large operating radius due to the 16 ft (5 m), rubber-clad, fine-stranded, industrial quality cable.



TALENT

12 V

ANTI-VIBRATION

AFMT 12 QSL benefits:

- Anti-vibration system. Effective reduction of vibration due to complete decoupling of self-supporting motor and housing. For safe and comfortable work with minimal physical stress and outstanding noise damping.
- ► **Tacho generator.** High-quality electronics for constant speed, even under load. Infinitely variable electronic speed control.
- DC motor. Proven motor technology. Small size, effective with high torque.
- SafetyCell technology. Li-ion batteries with individual cell monitoring. Perfect protection from overload, overheating and deep discharge. Capacity indicator on every battery.

The FEIN MULTITALENT. Overview of the sets.



	FEIN MULTITALENT START Q		
Model	FMT 250 QSL		
	The universal system for interior construction and renovation with the basic accessories for sanding and sawing.		
Tool mount	StarlockPlus*		
Tool change	QuickIN		
Vibration decoupling	-		
Electronic speed setting	•		
Tacho generator	-		
Softgrip zone	•		
Power consumption	250 Watts		
Oscillations	11,000-20,000 rpm		
Weight [according to EPTA]	3 lbs (1.4 kg)		
Cable length	16 ft (5 m)		
Order Number	7 229 53 62 09 0		
Set includes:	1 FEIN FMT 250 QSL, 1 Backing pad, 3 of each sanding sheet (grits 80, 120, 180), 1 Universal E-CUT saw blade 1-3/4 in (44 mm), 1 Nylon bag		

*suitable for Starlock and StarlockPlus accessories



	FEIN Cordless MULTITALENT QUICKSTART		
Model	AFMT 12 QSL		
	The cordless universal system for interior construction and renovation with QuickIN and the basic accessories for sanding and sawing.		
Tool mount	StarlockPlus*		
Tool change	QuickIN		
Vibration decoupling	•		
Electronic speed setting	•		
Tacho generator	•		
Softgrip zone	•		
Oscillations	11,000-18,000 rpm		
Weight [according to EPTA]	3.3 lbs (1.5 kg)		
Battery voltage	12 Volts		
Battery capacity	2.5 Ah		
Order number	7 129 25 61 09 0		
Set includes:	1 FEIN AFMT 12 QSL, 1 Backing pad, 3 of each sanding sheet (grits 80, 120, 180), 1 Universal E-CUT saw blade 1-3/4 (44 mm) 2 Li-ion batteries (2.5 Ah), 1 Rapid charger ALG 50, 1 Plastic carrying case		

 ${\small Emission\ values\ (noise/vibration)\ can\ be\ found\ at\ www.fein.com/vibration}$

*suitable for Starlock and StarlockPlus accessories

The FEIN MULTIMASTER. The standard of oscillating power tool excellence.

STARLOCK PLUS

The FEIN MultiMaster has proven itself millions of times around the world for almost 50 years and satisfies even the highest demands. It is equipped with everything required to make tough, day-to-day work a little easier, safer, better and excels due to its unrivaled quality, resilience and service life. Due to its innovative anti-vibration technology, it is smoother-running, more powerful and quieter than its predecessors and provides you with access to the complete range of Starlock and StarlockPlus accessories.

ANTI-VIBRATION

Your benefits with the FEIN MULTIMASTER:

- Anti-vibration system. Effective reduction of vibrations due to complete decoupling of self-supporting motor and housing. For safe, comfortable work with minimal physical stress and outstanding noise damping.
- ► StarlockPlus tool mount. Perfect accessory fitting due to stainless steel 3D mount. 100% power transfer for up to 35% faster cutting speed and increased precision.
- QuickIN. Patented, tool-free, FEIN rapid-clamping system. Fastest accessory change – under 3 seconds – in conjunction with Starlock. Secure and convenient.
- ► **Tacho generator.** High-quality electronics for constant speed, even under load. Infinitely variable electronic speed control.
- Interface. Mechanical interface for stationary use in the table support, drill press, or attachment of the depth stop.
- ► Metal drive head. High load capacity and maximum service life. All gearbox parts are metal.
- Corded and cordless model. Almost identical power with every FEIN MULTIMASTER.



Suitable for Starlock and StarlockPlus accessories.

350 W

FMM 350 QSL benefits:

- High-performance motor. Durable, overload-proof motor with high copper content for maximum power.
 Extremely smooth-running due to ball bearings at each end.
- ► Industrial-strength cable. Large operating radius due to the 16 ft (5 m), rubber-clad, fine-stranded, industrial quality cable.

MUTTIMASTER



18 V

AFMM 18 QSL benefits:

► **DC motor.** Proven motor technology. Small size, effective with high torque.

► SafetyCell technology. Li-ion batteries with individual cell monitoring. Perfect protection from overload, overheating and deep discharge. Capacity indicator on every battery.

The FEIN MULTIMASTER. Overview of the sets.



	FEIN MULTIMASTER START Q	FEIN MULTIMASTER QUICKSTART
Model	FMM 350 QSL	FMM 350 QSL
	The high-performance, universal system for interior construction and renovation with comprehensive accessories for unrivaled versatility.	The high-performance, universal system for interior construction and renovation with accessories for a wide range of applications.
Tool mount	StarlockPlus*	StarlockPlus*
Tool change	QuickIN	QuickIN
Vibration decoupling	•	•
Electronic speed setting	•	•
Tacho generator	•	•
Softgrip zone	•	•
Power consumption	350 Watts	350 Watts
Oscillations	10,000 – 19,500 rpm	10,000–19,500 rpm
Weight [according to EPTA]	3 lbs (1.4 kg)	3 lbs (1.4 kg)
Cable length	16 ft (5 m)	16 ft (5 m)
Order Number	7 229 52 64 09 0	7 229 52 67 09 0
Set includes:	1 FMM 350 QSL 1 Backing pad, 3 of each sanding sheet (80, 120, 180 grit), 1 Universal E-CUT saw blade 1-3/4 in (44 mm), 1 Nylon bag	1 FMM 350 QSL 1 Backing pad, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 E-CUT Universal saw blade 1-3/4 in (44 mm), 1 E-CUT Long-Life saw blade 2-9/16 in (65 mm), 1 HSS segment saw blade, 3-3/8 in (85 mm) dia., 1 Rigid scraper blade, 1 Plastic carrying case



Model FMM 330 QSL AFMM 18 QSL Weight performance, universal system for interior construction and renovation with comprehensive accessories for univaled versatility. The high-performance, universal system for interior construction and renovation with QuickIN and accessories for a wide range of applications. Tool mount StarlockPlus* StarlockPlus* Tool mount StarlockPlus* QuickIN Vibration decoupling QuickIN QuickIN Vibration decoupling 0 0 Electronic speed setting 0 0 Tool change 0 0 Ostingtip zone 0 0 Power consumption 350 Wats - Oscillations 10,000-19,500 rpm 10,000-19,500 rpm Statery colage - 18 V Battery colage - 18 V Battery colage 1 Elin PMM 350 QSL 1 Elin AFM 18 QSL Order Number 7 222 52 61 90 1 7 129 22 61 90 1 Stating pad, 3 of each anding sheet (60, 80, 120, 180 grib), 1 Backing pad, 3 of each anding sheet (60, 80, 120, 180 grib), 1 Backing pad, 3 of each anding sheet (60, 80, 120, 180 grib), 1 Backing pad, 3 of each anding sheet (60, 80, 120, 180 grib), 1 Backing pad, 3 of each anding sheet (60, 80, 120, 180 grib), 1 Backing pad, 3 of each anding sheet (60, 80, 120, 180 grib), 1 Backing pad, 3 of each anding sheet (1 Carbitre end), 1 Elin AFM 18 QSL, 1 Backing pad, 3 of each anding sheet (1 Carbitre end)		FEIN MULTIMASTER TOP	FEIN cordless MULTIMASTER
and renovation with comprehensive accessories for unrivaled versatility.construction and renovation with QuickIN and accessories for a wide range of applications.Tool mountStarlockPlus*StarlockPlus*Tool changeQuickINQuickINVibration decoupling••Electronic speed setting••Tacho generator••Softgrip zone••Oscillations10,000 - 19,500 rpm10,000 - 19,500 rpmWeight [according to EPTA]3 lbs (1.4 kg)4 lbs (1.8 kg)Cable length•-Battery voltage-18 VBattery voltage-2.5 AhOrder Number7229 52 61 09 07 129 22 61 09 0Set includes:1 Backing pad, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 Backing pad, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 Backing pad, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 Backing pad, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 Backing pad, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 Backing pad, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 Backing pad, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 Backing pad, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 Backing pad, 3 of each sanding sheet (60, 80, 120, 180, 11 kgild scraper blade, 1 HESIN FMM 18 CSIN, 1 HESIN Egyment blade, 1 HESIN FMM 18 CSIN, 1 HESIN Egyment asw blade, 2 HISIN Egyment asw blade, 2 HISIN Egyment asw blade, 2 HISIN Egyment asw blade, 1 HISIN Egyment asw blade, 1 HISIN Egyment ask of the mm), 1 Universal E-CUT asw blade 1-3/4 in (44 mm), 1 HISIN Egyment asw blade, 1 HISIN Egyment ask of the mm), 1 Universal E-CUT asw blade 1-3/4 in (44 mm), 1 HISIN Egyment asw blade, 1 HISIN Egyment asw blade, 1 HI	Model	FMM 350 QSL	AFMM 18 QSL
Versatility.wide range of applications.Tool mountStarlockPlus*Tool changeQuickINVibration decouplingQuickINVibration decoupling0Electronic speed setting0Tacho generator0Softgrip zone0Power consumption350 WattsOscillations0Oscillations10,000-19,500 rpmWeight [according to EPTA]3 lbs (1.4 kg)Battery voltage-Battery voltage16 ft (5 m)Order Number7229 52 61 09 0Set includes:1 EEIN FMM 350 QSL 1 Backing pad dust free, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 Backing pad, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 Backing pad, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 Backing pad, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 Lankerape ab dust free, 2 of each sanding sheet (61, 80, 120, 180 grit), 1 Long-Life saw blade 1-3/8 in 8 2-9/16 in (65 mm), 1 Universal E-CUT saw blade, 1-3/8 in 8 2-9/16 in (65 mm), 1 Universal E-CUT saw blade, 1-3/8 in 8 2-9/16 in (65 mm), 1 Universal E-CUT saw blade, 1-3/8 in 8 2-9/16 in (65 mm), 1 Universal E-CUT saw blade, 1-3/8 in 8 2-9/16 in (65 mm), 1 Universal E-CUT saw blade, 1-3/8 in 8 2-9/16 in (65 mm), 1 Universal E-CUT saw blade, 1-3/8 in 8 2-9/16 in (65 mm), 1 Universal E-CUT saw blade, 1-3/8 in 8 2-9/16 in (65 mm), 1 Universal E-CUT saw blade, 1-3/8 in 8 2-9/16 in (65 mm), 1 Universal E-CUT saw blade, 1-3/8 in 8 2-9/16 in (65 mm), 1 Universal E-CUT saw blade, 1-3/8 in 8 2-9/16 in (65 mm), 1 Universal E-CUT saw blade, 1-3/8 in 8 2-9/16 in (65 mm), 1 Universal E-CUT saw blade, 1-3/8 in 8 2-9/16 in (65 mm), 1 Universal E-CUT saw blade, 1-3/8 in 8 2-9			
Tool changeQuickINQuickINVibration decouplingElectronic speed settingTacho generatorSoftgrip zonePower consumption350 WattsOscillations10,000-19,500 rpm10,000-19,500 rpmWeight [according to EPTA]3 lbs (1.4 kg)4 lbs (1.8 kg)Cable length16 ft (5 m)Battery voltageSet includes:1 FEIN FMM 350 QSL1 Backing pad, 3 of each sanding sheet (08, 80, 120, 180 grit), 1 Backing pad, 3 of each sanding sheet (1.2 in (115 mm) dia, dust free, 2 of each sanding sheet (1.2 in (115 mm) dia, dust free, 2 of each sanding sheet (1.2 in (115 mm) dia, dust free, 2 of each sanding sheet (1.2 in (115 mm) dia, dust free, 2 of each sanding sheet (1.2 in (115 mm) (0.60, 80, 180 grit), 1 Sanding disc 4-11/2 in (115 mm) (60, 80, 180 grit), 1 Universal E-CUT saw blade 1-3/4 in (44 mm), 1 Universal E-CUT saw blade 1-3/4 in (44 mm), 1 Universal E-CUT saw blade 1-3/4 in (44 mm), 1 Sestic arryring case		versatility.	wide range of applications.
Vibration decoupling•Electronic speed setting•Tacho generator•Softgrip zone•Power consumption350 WattsPower consumption0Oscillations10,000–19,500 rpmWeight [according to EPTA]10,000–19,500 rpmWeight [according to EPTA]16 ft (5 m)Battery voltage-Battery capacity-Order Number7229 52 61 09 0Set includes:1 FEIN FMM 350 QSL 1 Backing pad, 30 feach sanding sheet (60, 80, 120, 180 grit), 1 Backing pad, 30 feach sanding sheet (40, 80, 41/2 in (115 mm), (60, 80, 180, 180, 180), 1 Rigid scraper blade, 1 0, 180 grit), 1 Extraction assembly, 1 Rigid scraper blade, 1 2 and 1 and 2-9/16 in (65 mm), 1 Universal F-CUT saw blade 1-3/8 in & 2-9/16 in (35 mm), 2 Li-ion batterles (2.5 Ah), 1 Rapid charger ALG 50, 1 HS segmentI how the state of the saw blade 1-3/8 in & 2-9/16 in (35 mm), 1 Universal F-CUT saw blade 1-3/8 in (32 mm 8 65 mm), 1 Universal F-CUT saw blade 1-3/4 in (44 mm), 2 Li-ion batterles (2.5 Ah), 1 Rapid charger ALG 50, 1 Universal F-CUT saw blade 1-3/4 in (44 mm), 1 Linoversal F-CUT saw blade 1-3/4 in (44 mm),	Tool mount	StarlockPlus*	StarlockPlus*
Electronic speed setting•Tacho generator•Softgrip zone•Power consumption350 WattsOscillations10,000 – 19,500 rpmOscillations10,000 – 19,500 rpmWeight [according to EPTA]3 lbs (1.4 kg)Cable length16 ft (5 m)Battery voltage-Battery voltage-Order Number7229 52 61 09 0Set includes:1 FEIN FPM 350 QSL 1 Backing pad, 3 of each sanding sheet (ds, 80, 120, 180 grit), 1 Backing pad, 3 of each sanding sheet dust free, 4.12 in (115 mm) (dia, dust free, 2.5 Ah)Set includes:1 FEIN FPM 350 QSL 1 Backing pad, 3 of each sanding sheet dust free, 4.12 in (115 mm) (dia, dust free, 2.12 in (115 mm), 60, 90, 180 grit), 1 Long-Life saw blade, -1.3/4 in (44 mm), 1 HSS segment1 Universal E-CUT saw blade 1-3/4 in (44 mm), 1 HSS segment1 HEIN carrying case	Tool change	QuickIN	QuickIN
Tacho generator••Softgrip zone••Power consumption350 Watts-Oscillations10,000–19,500 rpm10,000–19,500 rpmWeight [according to EPTA]3 lbs (1.4 kg)4 lbs (1.8 kg)Cable length16 ft (5 m)-Battery voltage-18 VBattery capacity-2.5 AhOrder Number7 229 52 61 09 07 129 22 61 09 0Set includes:1 FEIN FMM 350 QSL 1 Backing pad, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 Backing pad, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 Backing pad, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 Backing pad, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 Backing pad, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 Danding isheet dust free, 4-1/2 in (115 mm) (60, 80, 180) grit), 1 Extraction assembly, 1 Rigid scraper blade, 1 Each E-CUT Long-Life saw blade 1-3/4 in (44 mm), 1 Universal E-CUT Long-Life saw blade 2-9/16 in (65 mm), 1 Universal E-CUT aw blade 1-3/4 in (44 mm), 1 HSS segment 1 Universal E-CUT aw blade 1-3/4 in (44 mm), 1 HSS segment 1 Plastic carrying case	Vibration decoupling	•	•
Softgrip zone•Power consumption350 WattsOscillations10,000 – 19,500 rpmOscillations10,000 – 19,500 rpmWeight [according to EPTA]3 lbs (1.4 kg)Cable length16 ft (5 m)Battery voltage-Battery capacity-Order Number7 229 52 61 09 0Set includes:1 FEIN FMM 350 QSL 1 Backing pad dust free, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 Backing pad dust free, 3 of each sanding sheet dust free, 4 of each sanding sheet dust free, 4 of each sanding sheet dust free, 4 of each sanding sheet dust free, 2 of each sanding sheet dust free, 4 1/2 in (115 mm), (60, 80, 180 grit), 1 Extraction assembly, 1 Rigd scraper blade, 1 Each E-CUT Long-Life saw blade 1-3/8 in & 2-9/16 in (63 mm), 4 05 mm & 65 mm), 1 Universal E-CUT saw blade 1-3/4 in (44 mm), 1 HSS segment1 Universal E-CUT saw blade 1-3/4 in (44 mm), 1 HSS segment1 Plastic carrying case	Electronic speed setting	•	•
Song ip FoncCPower consumption350 WattsOscillations10,000–19,500 rpmWeight [according to EPTA]10,000–19,500 rpmWeight [according to EPTA]3 lbs (1.4 kg)Cable length16 ft (5 m)Battery voltage-Battery voltage-Battery capacity-Order Number7 229 52 61 09 0Set includes:1 FEIN FMM 350 QSL 1 Backing pad, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 Backing pad dust free, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 Backing pad dust free, 4 -1/2 in (115 mm) dia, dust free, 2 of each sanding sheet dust free 4 -1/2 in (115 mm) dia, 0, 180 grit), 1 Universal E-CUT saw blade 1-3/4 in (44 mm), 1 Universal E-CUT saw blade 1-3/4 in (44 mm), 1 Plastic carrying case	Tacho generator	•	•
Oscillations10,000-19,500 rpm10,000-19,500 rpmWeight [according to EPTA]3 lbs (1.4 kg)4 lbs (1.8 kg)Cable length16 ft (5 m)-Battery voltage-18 VBattery capacity-2.5 AhOrder Number7 229 52 61 09 07 129 22 61 09 0Set includes:1 FEIN FMM 350 QSL1 FEIN FMM 350 QSL1 Backing pad, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 Backing pad, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 Backing pad, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 Sanding disc 4-1/2 in (115 mm) dia, dust free, 2 of each sanding sheet dust free, 4-1/2 in (115 mm), (60, 80, 180 grit), 1 Universal E-CUT saw blade 1-3/8 in & 2-9/16 in (35 mm, 8 65 mm), 1 Universal E-CUT saw blade 1-3/4 in (44 mm), 1 HSS segment1 Felso Family and the arry of the same that free, 3 -9/16 in (35 mm, 8 65 mm), 1 Plastic carrying case	Softgrip zone	•	•
Weight [according to EPTA]3 lbs (1.4 kg)4 lbs (1.8 kg)Cable length16 ft (5 m)-Battery voltage-18 VBattery capacity-2.5 AhOrder Number7 229 52 61 09 07 129 22 61 09 0Set includes:1 FEIN FMM 350 QSL1 FEIN AFMM 18 QSL, 1 Backing pad, 3 of each sanding sheet (dos 80, 120, 180 grit), 1 Backing pad, 3 of each sanding sheet dust free, (60, 80, 120, 180 grit), 1 Backing sheet dust free, 4-1/2 in (115 mm) dia, dust free, 2 of each sanding sheet dust free, 4-1/2 in (115 mm), (60, 80, 180 grit), 1 Extraction assembly, 1 Rigit scraper blade, 1 Each E-CUT Long-Life saw blade 1-3/4 in (44 mm), 1 HSS segment1 Flatcic arrying case	Power consumption	350 Watts	-
Cable length16 ft (5 m)Battery voltage-Battery voltage-Battery capacity-Order Number7 229 52 61 09 0Set includes:1 FEIN FMM 350 QSL 1 Backing pad dust free, 3 of each sanding sheet dust free, (60, 80, 120, 180 grit), 1 Backing pad dust free, 3 of each sanding sheet dust free, (60, 80, 120, 180 grit), 1 Backing sheet dust free 4-1/2 in (115 mm) dia, dust free, 2 of each sanding sheet dust free 4-1/2 in (115 mm), (60, 80, 180 grit), 1 Extraction assembly, 1 Rigid scraper blade, 1 Each E-CUT Long-Life saw blade 1-3/4 in (44 mm), 1 HSS segment 1 Universal E-CUT saw blade 1-3/4 in (44 mm), 1 HSS segment 1 Plastic carrying case	Oscillations	10,000–19,500 rpm	10,000 – 19,500 rpm
Battery voltage - 18 V Battery capacity - 2.5 Ah Order Number 7 229 52 61 09 0 7 129 22 61 09 0 Set includes: 1 FEIN FMM 350 QSL 1 FEIN FMM 350 QSL 1 Backing pad, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 Backing pad dust free, 3 of each sanding sheet dust free, (60, 80, 120, 180 grit), 1 Sanding disc 4-1/2 in (115 mm) dia, dust free, 2 of each sanding sheet dust free 4-1/2 in (115 mm), (60, 80, 180 grit), 1 Extraction assembly, 1 Rigid scraper blade, 1 Each E-CUT Long-Life saw blade 1-3/8 in & 2-9/16 in (35 mm & 65 mm), 1 Universal E-CUT saw blade 1-3/4 in (44 mm), 1 HSS segment 1 E-CUT Long-Life saw blade 2-9/16 in (65 mm), 2 Li-ion batteries (25 Ah), 1 Rapid charger ALG 50, 1 Plastic carrying case	Weight [according to EPTA]	3 lbs (1.4 kg)	4 lbs (1.8 kg)
Battery capacity-2.5 AhOrder Number7 229 52 61 09 07 129 22 61 09 0Set includes:1 FEIN FMM 350 QSL 1 Backing pad, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 Backing pad dust free, 3 of each sanding sheet dust free, (60, 80, 120, 180 grit), 1 Sanding disc 4-1/2 in (115 mm) dia., dust free, 2 of each sanding sheet dust free 4-1/2 in (115 mm), (60, 80, 180 grit), 1 Extraction assembly, 1 Rigid scraper blade, 1 Each E-CUT Long-Life saw blade 1-3/4 in (44 mm), 1 HSS segment 1 Universal E-CUT saw blade 1-3/4 in (44 mm), 1 HSS segment1 Extraction assembly 1 Plastic carrying case	Cable length	16 ft (5 m)	-
Order Number7 229 52 61 09 07 129 22 61 09 0Set includes:1 FEIN FMM 350 QSL 1 Backing pad, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 Backing pad dust free, 3 of each sanding sheet dust free, (60, 80, 120, 180 grit), 1 Sanding disc 4-1/2 in (115 mm) dia, dust free, 2 of each sanding sheet dust free 4-1/2 in (115 mm), (60, 80, 180 grit), 1 Extraction assembly, 1 Rigid scraper blade, 1 Each E-CUT Long-Life saw blade 1-3/8 in & 2-9/16 in (35 mm & 65 mm), 1 Universal E-CUT saw blade 1-3/4 in (44 mm), 1 HSS segment1 FEIN AFMM 18 QSL, 1 Backing pad, 3 of each sanding sheet (grits 60, 80, 120, 180), 1 Rigid scraper blade, 1 HSS segment saw blade, 1 E-CUT Long-Life saw blade 1-3/4 in (44 mm), 2 Li-ion batteries (25 Ah), 1 Rapid charger ALG 50, 1 Plastic carrying case	Battery voltage	-	18 V
Set includes:1 FEIN FMM 350 QSL1 FEIN AFMM 18 QSL,1 Backing pad, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 Backing pad dust free, 3 of each sanding sheet dust free, (60, 80, 120, 180 grit), 1 Sanding disc 4-1/2 in (115 mm) dia., dust free, 2 of each sanding sheet dust free 4-1/2 in (115 mm), (60, 80, 180 grit), 1 Extraction assembly, 1 Rigid scraper blade, 1 Each E-CUT Long-Life saw blade 1-3/8 in & 2-9/16 in (35 mm & 65 mm), 1 Universal E-CUT saw blade 1-3/4 in (44 mm), 1 HSS segment1 FEIN AFMM 18 QSL, 1 Backing pad, 3 of each sanding sheet (grits 60, 80, 120, 180), 1 Rigid scraper blade, 1 E-CUT Long-Life saw blade 2-9/16 in (65 mm), 1 Universal E-CUT saw blade 1-3/4 in (44 mm), 1 HSS segment 1 Plastic carrying case	Battery capacity	-	2.5 Ah
1 Backing pad, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 Backing pad dust free, 3 of each sanding sheet dust free, (60, 80, 120, 180 grit), 1 Sanding disc 4-1/2 in (115 mm) dia., dust free, 2 of each sanding sheet dust free 4-1/2 in (115 mm), (60, 80, 180 grit), 1 Extraction assembly, 1 Rigid scraper blade, 1 Long-Life saw blade 1-3/4 in (44 mm), 1 HSS segment 1 Universal E-CUT saw blade 1-3/4 in (44 mm), 1 HSS segment1 Backing pad, 3 of each sanding sheet (grits 60, 80, 120, 180), 1 Rigid scraper blade, 1 HSS segment saw blade, 1 E-CUT Long-Life saw blade 1-3/4 in (44 mm), 1 HSS segment1 Backing pad, 3 of each sanding sheet (grits 60, 80, 120, 180), 1 Rigid scraper blade, 1 HSS segment saw blade, 1 Universal E-CUT saw blade 1-3/4 in (44 mm), 1 Universal E-CUT saw blade 1-3/4 in (44 mm), 1 HSS segment1 Backing pad, 3 of each sanding sheet (grits 60, 80, 120, 180), 1 Rigid scraper blade, 1 HSS segment saw blade, 1 E-CUT Long-Life saw blade 1-3/4 in (44 mm), 1 Universal E-CUT saw blade 1-3/4 in (44 mm), 1 HSS segment	Order Number	7 229 52 61 09 0	7 129 22 61 09 0
carrying case	Set includes:	1 Backing pad, 3 of each sanding sheet (60, 80, 120, 180 grit), 1 Backing pad dust free, 3 of each sanding sheet dust free, (60, 80, 120, 180 grit), 1 Sanding disc 4-1/2 in (115 mm) dia., dust free, 2 of each sanding sheet dust free 4-1/2 in (115 mm), (60, 80, 180 grit), 1 Extraction assembly, 1 Rigid scraper blade, 1 Each E-CUT Long-Life saw blade 1-3/8 in & 2-9/16 in (35 mm & 65 mm), 1 Universal E-CUT saw blade 1-3/4 in (44 mm), 1 HSS segment saw blade, 1 Carbide segment saw blade, 1 Carbide rasp, 1 Plastic	1 Backing pad, 3 of each sanding sheet (grits 60, 80, 120, 180), 1 Rigid scraper blade, 1 HSS segment saw blade, 1 E-CUT Long-Life saw blade 2-9/16 in (65 mm), 1 Universal E-CUT saw blade 1-3/4 in (44 mm), 2 Li-ion batteries (2.5 Ah), 1 Rapid charger ALG 50,

One system, 1,000 possibilities: Sawing.





 $E\text{-}C\cup\text{T}$ saw blades for almost all materials.

Adjustable working angle for sawing at corners and edges.



The smallest cutouts, 3/8 in (10 mm) and larger.



Oscillation motion eliminates risk of glass breakage.



Work flush with the surface.



No clearance required behind the workpiece.



Adequate power for all requirements.



Precise work close to edges, even with depth stop.



Distortion-free sawing, clean cut edges, thin cutting line – an advantage in auto body work.

Sanding.



With or without dust collection - great time savings, even with large surfaces.

Sanding at corners and edges without kickback.



Complete window renovation - everywhere, even without outlets.



The large sanding disc replaces additional sanding machines such as random orbit or pad sanders.



Flat backing pad for tight spaces.

Removing Grout and Rasping



Precise results without over cuts.



Maximum service life with diamond accessories.



Clean soiled tile joints efficiently with minimal effort.



Remove tile adhesive with rasp.



Even very small joints can be cut out with the narrow, 3/64 in (1.2 mm) saw blades.



Smooth cut-outs neatly and precisely.

Cutting and Scraping.





Remove old floor coverings quickly, easily and completely.



Up to 80% time savings when renewing planked teak decks.



Remove connection joints.



Different scraper models for a wide range of uses.

Cleaning and Polishing.



Polish high gloss surfaces.



Maintain vehicles and increase value.



Restore acrylic and polycarbonate.



FEIN original accessories for cleaning and polishing diverse surfaces.

The FEIN SUPERCUT CONSTRUCTION. The highest performance system for special applications.

The FEIN SUPERCUT CONSTRUCTION is the specialist among oscillating power tools. It is indispensable in industries that require a special accessory for specific application solutions as well as maximum performance and service life. The FEIN SUPERCUT CONSTRUCTION with StarlockMax mount can be combined with the entire FEIN accessory range, without limitation, and offers you all the freedom that you desire.

ANTI-VIBRATION



Your benefits with the FEIN SUPERCUT:

- Anti-vibration system. Effective reduction of vibrations due to complete decoupling of self-supporting motor and housing. For safe, comfortable work with minimal physical stress and outstanding noise damping.
- StarlockMax tool mount. Perfect accessory fitting due to stainless steel 3D mount. 100% power transfer for up to 35% faster cutting speed and increased precision. Unlimited versatility. Access to the complete range of FEIN original accessories.
- ► QuickIN. Patented, tool-free, FEIN rapid-clamping system. Fastest accessory change – under 3 seconds – in conjunction with Starlock. Secure and convenient.
- ► **Tacho generator.** High-quality electronics for constant speed, even under load. Infinitely variable electronic speed control.
- Interface. Mechanical interface for stationary use in the table support, drill press or attachment of the depth stop.
- Metal drive head. High load capacity and maximum service life. All gearbox parts are metal.
- Corded and cordless model. Almost identical power with every FEIN SUPERCUT.



Suitable for Starlock, StarlockPlus and StarlockMax accessories.

450 W

FSC 500 QSL benefits:

- High-performance motor. Durable, overload-proof motor with high copper content for maximum power.
 Extremely smooth-running due to ball bearings at each end.
- ► Industrial-strength cable. Large operating radius due to the 16 ft (5 m), rubber-clad, fine-stranded, industrial quality cable.

SuperCut Construction



18 V

AFSC 18 QSL benefits:

- FEIN PowerDrive motor. Powerful, practically wear-free, brushless motor with very high efficiency. Powerful drive shaft and dust-sealed housing for extreme resilience and service life.
- SafetyCell technology. Li-ion batteries with individual cell monitoring. Perfect protection from overload, overheating and deep discharge. Capacity indicator on every battery.

The FEIN SUPERCUT CONSTRUCTION. Overview of machines and Professional Sets.



Emission values (noise/vibration) can be found at www.fein.com/vibration

*suitable for Starlock, StarlockPlus and StarlockMax accessories



FEIN SUPERCUT Professional Set Wood

The high-performance system for interior construction and renovation, with special accessories for fast, accurate sawing when assembling wood.

Price includes	1 FEIN FSC 500 QSL	1 FEIN AFSC 18 QSL 2 Batteries (li-ion, 18 V, 5 Ah), 1 Rapid charger ALG 50
	0 , ,	ades, 1 of each E-C∪⊤ Universal 151 and 152 saw blades, grits 80, 120, 180), 1 Plastic carrying case





The FEIN SUPERCUT CONSTRUCTION Professional Sets: Wood.



Cutouts in furniture in difficult-to-reach spots.



Even heavy construction lumber can be effortlessly cut to length with the SUPERCUT.



Door jamb trimming works perfectly.



Deep cuts are made quickly and easily anywhere on site.

The FEIN SUPERCUT CONSTRUCTION Professional Sets: Caulking.



Long cutting blade for very deep joints.



Removal of flexible joint sealants in above and below-ground construction.



Remove connection joints.

"Quality, precision, reliability – that's what an Original means to me."

Tobias Abele, master carpenter and restorer

The tool mount standard for oscillating power tools.





Universal accessory tool mount for all FEIN oscillating power tools and the most popular multifunction tools on the market.

Starlock fits:

- ✓ FEIN MULTITALENT
- ✓ FEIN MULTIMASTER
- ✓ FEIN SUPERCUT
- Bosch, Makita, Rigid, Milwaukee and many more.

STARLOCK PLUS

Accessory tool mount for all FEIN oscillating power tools and other multifunction tools with StarlockPlus tool mounts.

StarlockPlus fits:

- FEIN MULTITALENT
 FEIN MULTIMASTER
- ✓ FEIN SUPERCUT
- 🗸 Bosch

STARLOCK MAX

Accessory tool mount for FEIN SUPERCUT and other oscillating power tools with StarlockMax tool mount.

StarlockMax fits:

- ✓ FEIN SUPERCUT
- ✓ Bosch

FEIN benefits with Starlock:

- 3 performance classes for reliable protection of power tools from overload and damage.
- Perfect, accessory fitting with 100% power transfer for outstanding cutting speed.
- Rigid, stainless steel 3D mount for significantly better precision and results.
- Fits all previous FEIN oscillating power tools.

Exactly the right solution for thousands of professional and special applications.

Count on FEIN original accessories with the Starlock tool mount. It was specially developed for use with FEIN oscillating power tools. In combination with the machines, it makes a comprehensive system that provides the perfect solution for almost every task. You benefit from an absolutely reliable, convenient and fast tool change in less than 3 seconds. At the same time, the system guarantees perfect fitting– and thus, optimum power transmission.

Your benefits:

- ► Superior material.
- ► Tested and proven FEIN quality for almost 50 years.
- Maximum cutting speed and unrivaled service life.
- Unique range of products.
- ► Maximum performance only with the FEIN system.



Made by FEIN

For us, this is not only a mark of quality, but a promise: Developed by FEIN and largely made in Germany at state-ofthe-art production facilities. This means carefully material selection, perfect workmanship, maximum service life guaranteed and the greatest possible precision.

Further information about accessories at: www.fein.com/original





FEIN accessories for sawing.

The FEIN original accessories for sawing set standards. They include application solutions that don't have a comparable alternative and offer the greatest possible precision, even in the most demanding applications. The unique accessories enable sawing flush with the surface and also allow trouble-free plunging into solid material. They can be mounted in 12 different positions around the tool axis of the oscillating power tool, so the best performance can be achieved, even in tight spots.

Your benefits:

STARLOCKPLUS

- The largest selection of shapes, sizes and qualities for unlimited versatility.
- Rigid stainless steel holders for completely smooth running and precise results.
- Unique application solutions such as stationary use in a drill stand and sawing with a depth stop.

Flush with the surface

An application solution that otherwise can only be mastered by hand with special tools. FEIN oscillating power tools complete it quickly, precisely and easily.



E-CUT saw blades The most successful range for almost all materials and requirements. HSS saw blades Solid HSS or bimetal saw blades with teeth for metal or wood and extra long service life.

MULTIMASTER

SAWING ACCESSORIES

FEIN original accessories for sawing* **OCK** PLUS



Saw blade For all soft materials.

Segmented, ideal for working in corners and on edges without over cut.

Dia.	Qty		
in (mm)	pcs	Mount	Part Number
3-3/8 (85)	1	SL	6 35 02 113 21 0



Solid HSS saw blade with metal teeth for sheet metal up to approx. 5/64 in (2 mm) Also for plastics, GFRP, wood, glazing compound, brass and bronze. Outstanding cutting speed. Clean, narrow cutting line.

Excellent cost-effectiveness due to the circular shape.

Dia.	Qty		
in (mm)	pcs	Mount	Part Number
3-3/8 (85)	1	SL	6 35 02 097 21 0
3-3/8 (85)	2	SL	6 35 02 097 22 0
3-3/8 (85)	5	SL	6 35 02 097 23 0



HSS saw blade

Solid HSS saw blade with metal teeth for sheet metal up to approx. 5/64 in (2 mm) Also for plastics, GFRP, wood, glazing compound, brass and bronze. Outstanding cutting speed. Clean, narrow cutting line.

Segmented, ideal for working in corners and on edges without over cut.

Dia.	Qty		
in (mm)	pcs	Mount	Part Number
3-3/8 (85)	1	SL	6 35 02 106 21 0
3-3/8 (85)	2	SL	6 35 02 106 22 0
3-3/8 (85)	5	SL	6 35 02 106 23 0



HSS saw blade

Bimetal for long service life. Metal teeth for sheet metal up to approx. 5/64 in (2 mm) Also for plastics, GFRP, wood, glazing compound, brass and bronze. Work flush with the surface. Excellent cost-effectiveness thanks to the circular shape.

Dia.	Qty		
in (mm)	pcs	Mount	Part Number
3-3/8 (85)	1	SL	6 35 02 174 21 0
3-3/8 (85)	5	SL	6 35 02 174 23 0



HSS saw blade Bimetal for long service life.

Metal teeth for sheet metal up to approx. 5/64 in (2 mm) Also for plastics, GFRP, wood, glazing compound, brass and bronze. Work flush with the surface.

Optimal cost-effectiveness thanks to circular shape and extra large diameter. 0

in (mm)	pcs	Mount	Part Number
4 (100)	1	SLP	6 35 02 175 21 0
4 (100)	5	SLP	6 35 02 175 23 0

	Metal teeth approx. 5/6 compound,	ong service life. for sheet metal up to 4 in (2 mm) Also for p brass and bronze. Wor	lastics, GFRP, wood, glazing k flush with the surface. rners and on edges without
Dia.	Qty		
in (mm)	pcs	Mount	Part Number
4 (100)	1	SLP	6 35 02 196 21 0
4 (100)	5	SLP	6 35 02 196 23 0



HSS saw blade

Bimetal for long service life. Set teeth for wood. Outstanding life, very clean cut and excellent work progress. The "mini" circular saw is ideal for long straight cuts and cutting existing parquet, laminate, and wood paneling.

Dia.			
in (mm)	pcs.	Mount	Part Number
4 (100)	1	SLP	6 35 02 176 21 0



HSS saw blade set

Bimetal for long service life. Set teeth for wood. Outstanding life, very clean cut and excellent work progress. The "mini" circular saw is ideal for long straight cuts and cutting existing parquet, laminate, and wood paneling. The depth stop can also be used with many other FEIN accessories for precise deep work. StarlockPlus mount fits all popular multifunction tools with StarlockPlus and StarlockMax mounts, as well as FEIN MULTITALENT and MULTIMASTER up to April 2016. Price includes: 1 HSS saw blade, 1 depth stop (fits FMM 350 QSL, AFMM 18 QSL, AFSC 18 QSL, FSC 500 QSL)

Dia.		
in (mm)	Mount	Part Number
4 (100)	SLP	3 52 22 952 01 0



Blade guard Replacement safety guard for HSS saw blade 6 35 02 176 21 0.

Part Number

Depth stop



Depth stop for all saw blades. For exact, deep work. Effective saw blade and workpiece protection. Contents: 1 adapter for attachment to the machine, rotates 360°. 1 depth stop, 1 adjustable depth guide. Only usable with (A)FMM or (A)FSC.

Part Number

3 21 27 069 01 0

3 18 10 263 00 0



* FEIN original accessories also fit many other multifunction tools on the market. Further information at: www.fein.com/starlock

SL = Starlock | SLP = StarlockPlus | SLM = StarlockMax

The FEIN Accessory Highlights:



FEIN E-CUT Precision bimetal saw blades:

Double row of Japanese teeth with outstanding clean cuts. 3 x longer service life due to the bimetal with HSS cutting teeth. Extremely powerful due to shorter, specially shaped teeth at the outer edges.



FEIN E-CUT Long-Life saw blades:

FEIN E-CUT Long-Life saw blades are especially powerful with unrivaled service life due to bimetal teeth. Even nails in wood can be cut through effortlessly. FEIN Long-Life saw blades are available in widths of 3/8 in (10 mm) and wider.



E-CUT Long-Life saw blade

Bimetal with teeth set for all woods, drywall and plastic materials. Outstanding service life, very clean cut and excellent work progress. Extremely robust, unaffected by nails in wood (up to approx. 3/16 in (5 mm)dia., masonry, etc. Short, very narrow shape for the smallest cutouts.

Length	Width			
in (mm)	in (mm)	pcs.	Mount	Part Number
2 (50)	3/8 (10)	1	SL	6 35 02 184 26 0
2 (50)	3/8 (10)	3	SL	6 35 02 184 27 0
2 (50)	3/8 (10)	10	SL	6 35 02 184 29 0
2 (50)	13/16 (20)	1	SL	6 35 02 183 26 0
2 (50)	13/16 (20)	3	SL	6 35 02 183 27 0
2 (50)	13/16 (20)	10	SL	6 35 02 183 29 0



140.1.1

E-CUT Standard saw blade

Set teeth for all woods, drywall and plastic materials, very clean cuts and good cutting speed.

Medium width, narrowed middle shape for optimal cutting speed and good swarf removal.

Length	vvidth			
in (mm)	in (mm)	pcs.	Mount	Part Number
2 (50)	1-3/8 (35)	1	SL	6 35 02 133 26 0
2 (50)	1-3/8 (35)	3	SL	6 35 02 133 27 0
2 (50)	1-3/8 (35)	10	SL	6 35 02 133 29 0



E-CUT Long-Life saw blade

Bimetal with teeth set for all woods, drywall and plastic materials. Outstanding service life, very clean cut and excellent work progress. Extremely robust, unaffected by nails in wood (up to approx. 3/16 in (5 mm) dia.), masonry, etc. Medium width, narrowed middle shape for optimal cutting speed and good swarf removal.

Length	Width		M .	
in (mm)	in (mm)	pcs.	Mount	Part Number
2 (50)	1-3/8 (35)	1	SL	6 35 02 160 26 0
2 (50)	1-3/8 (35)	3	SL	6 35 02 160 27 0
2 (50)	1-3/8 (35)	10	SL	6 35 02 160 29 0
- (50)				
2 (50)	2 (50)	1	SL	6 35 02 221 26 0
2 (50)	2 (50)	3	SL	6 35 02 221 27 0
2 (50)	2 (50)	10	SL	6 35 02 221 29 0
2 4/2 [/ []	2 [[0]	4	CI	6 35 02 228 26 0
2-1/2 [65]	2 [20]	1	SL	6 35 02 228 26 0
2-1/2 [65]	2 [50]	3	SL	6 35 02 228 27 0
2-1/2 [65]	2 [50]	10	SL	6 35 02 228 29 0



E-CUT Long-Life saw blade

Bimetal with teeth set for all woods, drywall and plastic materials. Outstanding service life, very clean cut and excellent work progress. Extremely robust, unaffected by nails in wood (up to approx. 3/16 in (5 mm) dia.), masonry, etc. Wide shape for maximum cutting performance and long straight cuts.

Length Width

in (mm)	in (mm)	pcs.	Mount	Part Number
2 (50)	2-9/16 (65)	1	SLP	6 35 02 161 26 0
2 (50)	2-9/16 (65)	3	SLP	6 35 02 161 27 0
2 (50)	2-9/16 (65)	10	SLP	6 35 02 161 29 0

E-CUT Standard saw blade

Set teeth for all woods, drywall and plastic materials, very clean cuts and good cutting speed.

Wide shape for maximum cutting performance and long straight cuts.

ngth Width

Lengen	· · · · · · · · · · · · · · · · · · ·			
in (mm)	in (mm)	pcs.	Mount	Part Number
2 (50)	2-9/16 (65)	1	SLP	6 35 02 134 26 0
2 (50)	2-9/16 (65)	3	SLP	6 35 02 134 27 0
2 (50)	2-9/16 (65)	10	SLP	6 35 02 134 29 0



E-CUT Precision BIM saw blade

Bimetal with double-row Japanese teeth for all wood materials, drywall and soft plastics. Increased service life and robustness. Fastest work progress and maximum precision. Medium width, narrowed middle shape for optimal cutting speed and good swarf removal.

Length Width

in (mm)	in (mm)	pcs.	Mount	Part Number
2 (50)	1-3/8 (35)	1	SL	6 35 02 205 26 0
2 (50)	1-3/8 (35)	3	SL	6 35 02 205 27 0
2 (50)	1-3/8 (35)	10	SL	6 35 02 205 29 0



E-CUT Precision BIM saw blade

Bimetal with double-row Japanese teeth for all wood materials, drywall and soft plastics. Increased life and robustness. Fastest work progress and maximum precision. Medium width for numerous applications.

Length Width

in (mm)	in (mm)	pcs.	Mount	Part Number
2 (50)	1-3/4 (44)	1	SLP	6 35 02 206 26 0
2 (50)	1-3/4 (44)	3	SLP	6 35 02 206 27 0
2 (50)	1-3/4 (44)	10	SLP	6 35 02 206 29 0



E-CUT Precision BIM saw blade

Bimetal with double-row Japanese teeth for all wood materials, drywall and soft plastics. Increased service life and robustness. Fastest work progress and maximum precision. Wide shape for efficient sawing.

Length	Width			
in (mm)	in (mm)	pcs.	Mount	Part Number
2 (50)	2-3/16 (55)	1	SLP	6 35 02 207 26 0
2 (50)	2-3/16 (55)	3	SLP	6 35 02 207 27 0
2 (50)	2-3/16 (55)	10	SLP	6 35 02 207 29 0



E-CUT Precision BIM saw blade

Bimetal with double-row Japanese teeth for all wood materials, drywall and soft plastics. Increased service life and robustness. Fastest work progress and maximum precision. Extra-wide shape for maximum cutting performance and long straight cuts.

Length	Width		
in (mm)	in (mm) pcs.	Mount	Part Number
2 (50)	2-9/16 (65) 1	SLP	6 35 02 208 26 0
2 (50)	2-9/16 (65) 3	SLP	6 35 02 208 27 0
2 (50)	2-9/16 (65) 10	SLP	6 35 02 208 29 0



E-CUT Precision saw blade

Double-row Japanese teeth for all wood materials, drywall and soft plastics. Fastest work progress and maximum precision. Medium width, narrowed middle shape for optimal cutting speed and good swarf removal.

Length	Width
in (mm)	in (mm

in (mm)	in (mm)	pcs.	Mount	Part Number
2 (50)	1-3/8 (35)	1	SL	6 35 02 126 26 0
2 (50)	1-3/8 (35)	3	SL	6 35 02 126 27 0
2 (50)	1-3/8 (35)	10	SL	6 35 02 126 29 0



E-CUT Precision saw blade

Double-row Japanese teeth for all wood materials, drywall and soft plastics. Fastest work progress and maximum precision. Medium width for numerous applications.

Length	Width
--------	-------

in (mm)	in (mm)	pcs.	Mount	Part Number
2 (50)	1-3/4 (44)	1	SLP	6 35 02 198 26 0
2 (50)	1-3/4 (44)	3	SLP	6 35 02 198 27 0
2 (50)	1-3/4 (44)	10	SLP	6 35 02 198 29 0



E-CUT Standard saw blade, curved

Set teeth for all wood, drywall and plastic materials, very clean cuts and good cutting speed. Hooked cutting geometry for optimal plunge cutting and clean, precise cut edges, especially on smooth surfaces.

Narrow, waisted shape for optimal cutting speed and good swarf removal.

Width	Length		Qty	
in [mm]	in [mm]	Mount	pcs	Part Number
1-1/2 [35]	2-1/4 [55]	SL	1	6 35 02 227 26 0
1-1/2 [35]	2-1/4 [55]	SL	3	6 35 02 227 27 0
1-1/2 [35]	2-1/4 [55]	SL	10	6 35 02 227 29 0



E-CUT Standard saw blade, curved

Set teeth for all wood, drywall and plastic materials, very clean cuts and good cutting speed. Hooked cutting geometry for optimal plunge cutting and clean, precise cut edges, especially on smooth surfaces.

Medium width for numerous applications.

Width	Length		Qty	
in [mm]	in [mm]	Mount	pcs	Part Number
2 [50]	2 [50]	SL	1	6 35 02 226 26 0
2 [50]	2 [50]	SL	3	6 35 02 226 27 0
2 [50]	2 [50]	SL	10	6 35 02 226 29 0



E-CUT Standard saw blade, curved

Set teeth for all wood, drywall and plastic materials, very clean cuts and good cutting speed. Hooked cutting geometry for optimal plunge cutting and clean, precise cut edges, especially on smooth surfaces.

Wide shape for maximum cutting performance and long straight cuts.

Width	Length		Qty	
in [mm]	in [mm]	Mount	pcs	Part Number
2-1/2 [65]	2 [50]	SL	1	6 35 02 225 26 0
2-1/2 [65]	2 [50]	SL	3	6 35 02 225 27 0
2-1/2 [65]	2 [50]	SL	10	6 35 02 225 29 0



E-CUT Precision BIM saw blade

Bimetal with double-row Japanese toothing for all wood materials, drywall and soft plastics. Increased service life and strength. Fastest work performance and maximum precision. Extra-wide shape for maximum cutting performance and long

straight cuts.

Width in [mm]	Length in [mm]	Mount	Qty pcs	Part Number
2-1/2 [65]	2 [50]	SL	1	6 35 02 229 26 0
2-1/2 [65]	2 [50]	SL	3	6 35 02 229 27 0
2-1/2 [65]	2 [50]	SL	10	6 35 02 229 29 0



E-CUT Precision saw blade

Double-row Japanese toothing for all wood materials, drywall and soft plastics. Fastest work performance and maximum precision. Extra-wide shape for maximum cutting performance and long straight cuts.

Width	Length		Qty	
in [mm]	in [mm]	Mount	pcs	Part Number
2-1/2 [65]	2 [50]	SL	1	6 35 02 230 26 0
2-1/2 [65]	2 [50]	SL	3	6 35 02 230 27 0
2-1/2 [65]	2 [50]	SL	10	6 35 02 230 29 0



E-CUT Precision saw blade

Double-row Japanese teeth for all wood materials, drywall and soft plastics. Fastest work progress and maximum precision. Wide shape for efficient sawing.

Length Width in (mm) in (mm) Mount Part Number pcs. 2 (50) 2-3/16 (55) SLP 6 35 02 199 26 0 1 2 (50) 2-3/16 (55) 3 SLP 6 35 02 199 27 0 2 (50) 2-3/16 (55) 10 SLP 6 35 02 199 29 0



E-CUT Precision saw blade

Double-row Japanese teeth for all wood materials, drywall and soft plastics. Fastest work progress and maximum precision. Extra-wide shape for maximum cutting performance and long straight cuts.

Length	Width			
in (mm)	in (mm)	pcs.	Mount	Part Number
2 (50)	2-9/16 (65)	1	SLP	6 35 02 127 26 0
2 (50)	2-9/16 (65)	3	SLP	6 35 02 127 27 0
2 (50)	2-9/16 (65)	10	SLP	6 35 02 127 29 0



E-CUT Fine saw blade

Bimetal with fine teeth for sheet metal up to 5/64 in (2 mm), aluminum profiles, copper pipes. Also for GFRP and other hard plastics. Extremely precise and easily controlled cut with an especially narrow cutting line.

Medium width, narrowed middle shape for optimal cutting speed and good swarf removal.

Length	Width			
in (mm)	in (mm)	pcs.	Mount	Part Number
2 (50)	1-3/16 (30)	1	SL	6 35 02 157 26 0
2 (50)	1-3/16 (30)	3	SL	6 35 02 157 27 0
2 (50)	1-3/16 (30)	10	SL	6 35 02 157 29 0



Length

E-CUT Universal saw blade

Bimetal with wavy universal teeth. Broad application spectrum for sheet metal up to 5/64 in (2 mm), aluminum profile, copper pipes, wood, drywall and plastics. Narrow width, narrowed middle shape for optimal cutting speed

and good swarf removal. Width

in (mm)	in (mm)	pcs.	Mount	Part Number
2-3/8 (60)	1-1/8 (28)	1	SLP	6 35 02 151 26 0
2-3/8 (60)	1-1/8 (28)	3	SLP	6 35 02 151 27 0
2-3/8 (60)	1-1/8 (28)	10	SLP	6 35 02 151 29 0
2 (50)	1-1/8 (28)	1	SL	6 35 02 222 26 0
2 (50)	1-1/8 (28)	3	SL	6 35 02 222 27 0
2 (50)	1-1/8 (28)	10	SL	6 35 02 222 29 0



E-CUT Universal saw blade

Bimetal with wavy universal toothing. Broad application spectrum for sheet metal up to 5/64 in (2 mm), aluminum profile, copper pipes, wood, drywall and plastics. Wide width, narrowed middle shape for optimal cutting speed and good swarf removal.

Length in (mm)	Width in (mm)	pcs.	Mount	Part Number
2-3/8 (60)	1-3/4 (44)	1	SLP	6 35 02 152 26 0
2-3/8 (60)	1-3/4 (44)	3	SLP	6 35 02 152 27 0
2-3/8 (60)	1-3/4 (44)	10	SLP	6 35 02 152 29 0
2 (50)	1-3/4 (44)	1	SL	6 35 02 223 26 0
2 (50)	1-3/4 (44)	3	SL	6 35 02 223 27 0
2 (50)	1-3/4 (44)	10	SL	6 35 02 223 29 0



Carbide saw blade

Open teeth for perfect, clean cut edges without delamination in CFRP/fiberglass materials. Distortion-free, long, straight cuts with very high cutting speed and precision.

Extra thin version. Kerf approx. 3/64 in (1.2 mm) Segmented, ideal for working in corners and on edges without over cut.

Dia.		
in (mm)	Mount	Part Number
3-9/16 (90)	SLP	6 35 02 187 21 0

Diamond saw blade

Open teeth for perfect, clean cut edges without delamination in CFRP/fiberglass materials. Distortion-free, long, straight cuts with very high cutting speed and precision.

Diamond coating for exceptional service life. Extra thin version. Kerf approx. 3/64 in (1.2 mm) Segmented, ideal for working in corners and on edges without over cut.

Dia.		
in (mm)	Mount	Part Number
3-9/16 (90)	SLP	6 35 02 188 21 0



E-CUT carbide saw blade

For perfect, clean cut edges without delamination in CFRP/ fiberglass materials. Particularly suitable for precise cutouts and short cuts. Precise work right into corners and on edges.

Length	Width		
in (mm)	in (mm)	Mount	Part Number
2 (50)	1-3/8 (35) SLP	6 35 02 191 21 0



E-CUT	diamond	i saw b	lade	
Diamor	d coating	for ever	antional	con

ating for exceptional service life. For perfect, clean cut edges without delamination in CFRP/fiberglass materials. Particularly suitable for precise cutouts and short cuts. Precise work right into corners and on edges.

Length	Width	
in (mm)	in (mm) Mount	Part Number
2 (50)	1-3/8 (35) SLP	6 35 02 193 21 0



Multi-knife

For cutting carpet, PVC flooring, cardboard, bitumen shingles and roofing paper. With three cutting surfaces.

	Qty			
Mount	pcs	Part Number		
SL	1	6 39 03 251 26 0		
SL	5	6 39 03 251 28 0		



Best of Renovation Accessory Set*

34-piece accessory set for numerous renovation jobs in a practical plastic storage case at a special price. Extremely versatile for sawing, sanding, cutting and much more. Attractive savings compared to individual purchase. Contents: 1 each E-CUT Long-Life saw blades 3/8 in (10 mm) and 13/16 in (20 mm), 3 each E-CUT Long-Life saw blades 1-3/8 in (35 mm) and 2-9/16 in (65 mm), 1 each E-CUT Universal saw blades 1-1/8 in (28 mm) and 1-3/4 in (44 mm), 1 HSS saw blade, segmented 3-3/8 in (85 mm) dia., 1 carbide-saw blade, segmented 3-9/16 in (90 mm)dia., 1 carbide file 3/8 in (10 mm), 1 short rigid scraper 1 triangular packing pad, unperforated, with 3 of each sanding sheet, grits 60, 80, 120, 180, 1 backing pad 4-1/2 in (115 mm) dia. with 2 of each sanding sheet, grits 60, 80, 180.

*Special order only

Mount	Part Number
SLP	3 52 22 942 06 0



Best of E-CUT Accessory Set Consists of 6 different E-CUT saw blades with bimetal teeth in a practical plastic storage box at a special price. Contents: 1 each E-CUT Universal saw blades, 1-1/8 in (28mm) (151) and 1-3/4 in (44 mm) wide (152) and 2 each E-CUT Long-Life saw blades

1-3/8 in (35 mm) (160) and 2-9/16 in (65 mm) wide (161). Part Number Mount SLP 3 52 22 942 08 0



E-CUT Combo Pack

Selection of the 3 most popular FEIN E-CUT saw blades for universal use. Savings compared to individual purchase. Ready for any sawing job.

Price includes: 1 each E-CUT Long-Life saw blade, 1-3/8 in (35 mm) (160) and 2-9/16 in (65mm) wide (161), 1E-CUT universal saw blade, 1-3/4 in (44 mm) wide (152).

Mount	Part Number
SLP	3 52 22 952 09 0



E-CUT Combo Pack

Consists of 3 different E-CUT saw blades with bimetal teeth. Contents: 1 E-CUT Long-Life saw blade, 2 in (50 mm) wide (221), 1 each E-CUT Universal saw blade 1-1/8 in (28 mm) (222) and 1-3/4 in (44 mm) wide (223).

Mount	Part Number
SL	3 52 22 952 14 0



FEIN original accessories for sawing*





E-CUT Standard saw blade

Set teeth for all woods, drywall and plastic materials, very clean cuts and good cutting speed. Long, narrowed middle shape for large plunge depths, optimal cutting speed and good swarf removal.

Width Length Mount Part Number in (mm) in mm) pcs 3-1/16 (78) 1-1/4 (32) SLM 6 35 02 200 26 0 1 3-1/16 (78) 1-1/4 (32) SLM 6 35 02 200 27 0 3 6 35 02 200 29 0 3-1/16 (78) 1-1/4 (32) 10 SLM



E-CUT Long-Life saw blade

Bimetal with teeth set for all woods, drywall and plastic materials. Outstanding service life, very clean cut and excellent work progress. Extremely powerful, unaffected by nails in wood (up to approx. 3/16 in (5 mm) dia.), masonry, etc. Long, narrowed middle shape for large plunge depths, optimal cutting speed and good swarf removal.

Length	Width			
in (mm)	in (mm)	pcs.	Mount	Part Number
3-1/16 (78)	1-1/4 (32)	1	SLM	6 35 02 201 26 0
3-1/16 (78)	1-1/4 (32)	3	SLM	6 35 02 201 27 0
3-1/16 (78)	1-1/4 (32)	10	SLM	6 35 02 201 29 0



E-CUT Standard saw blade

Set teeth for all woods, drywall and plastic materials, very clean cuts and good cutting speed. Long, wide width shape for large plunge depths and efficient work, optimal cutting speed and good swarf removal.

Length in (mm)	Width in (mm)	pcs.	Mount	Part Number
3-1/16 (78)	1-5/8 (42 mm)	1	SLM	6 35 02 202 26 0
3-1/16 (78)	1-5/8 (42 mm)	3	SLM	6 35 02 202 27 0
3-1/16 (78)	1-5/8 (42 mm)	10	SLM	6 35 02 202 29 0



E-CUT Long-Life saw blade

Bimetal with teeth set for all woods, drywall and plastic materials. Outstanding service life, very clean cut and excellent work progress. Extremely robust, unaffected by nails in wood (up to approx. 3/16 in (5 mm) dia.), masonry, etc. Long, wide width shape for large plunge depths and efficient work, optimal cutting speed and good swarf removal.

Length in (mm)	Width in (mm)	pcs.	Mount	Part Number
3-1/16 (78)	1-5/8 (42)	1	SLM	6 35 02 203 26 0
3-1/16 (78)	1-5/8 (42)	3	SLM	6 35 02 203 27 0
3-1/16 (78)	1-5/8 (42)	10	SLM	6 35 02 203 29 0

Diamond saw blade



For the removal of marble, epoxy resin and pozzolan grouts. Outstanding tool life. Also suitable for very hard epoxy or cement grouts. The right choice for frequent use and demanding tasks. Extra thin version. Kerf approx. 3/64 in (1.2 mm).

Dia. in [mm]	Qty pcs	Mount	Part Number
4-1/8 (105)	1	SLM	6 35 02 219 21 0
4-1/8 (105)	5	SLM	6 35 02 219 23 0

Carbide saw blade

Open teeth for perfect, clean cut edges without delamination in CFRP/fiberglass materials. Distortion-free, long, straight cuts with very high cutting speed and precision. Extra thin version. Kerf approx. 3/64 in. (1.2 mm)

Dia.		
in (mm)	Mount	Part Number
4-1/8 (105)	SLM	6 35 02 215 21 0



Diamond saw blade

Open teeth for perfect, clean cut edges without delamination in CFRP/fiberglass materials. Distortion-free, long, straight cuts with very high cutting speed and precision.

Diamond coating for exceptional service life. Extra thin version. Kerf approx. 3/64 in (1.2 mm) Segmented, ideal for working in corners and on edges without over cut.

Dia. in	Mount	Part Number
4-1/8 (105)	SLM	6 35 02 220 21 0
	E-CUT diamond saw blade	

E-CUT diamond saw blade

Diamond coating for exceptional service life. For perfect, clean cut edges without delamination in CFRP/fiberglass materials. Particularly suitable for precise cutouts and short cuts. Precise work right into corners and on edges.

Length	Width	
in (mm)	in (mm) Mount	Part Number
2-3/8 (60)	1-3/4 (44) SLM	6 35 02 204 21 0

Segment saw blade

For removal of insulating glass panes set in glazing compound.

0		

Mount SLM

Part Number 6 39 03 244 22 0

Accessory sets



Accessory Set Interior Construction*

27-piece accessory set with extensive saw blade selection especially for fast, precise sawing in all assembly tasks. Attractive savings compared to individual purchase. Contents: 5 E-CUTLong-Life saw blades (1 of each, 183, 160, 161, 201, 203), 2 E-CUT Precision bimetal saw blades (1 of each, 205, 208), 2 E-CUT Universal saw blades (1 of each, 151, 152), 1 HSS saw blade for wood, bimetal, 4 in (100mm) dia., 1 depth stop, for use with all saw blades, 1 backing pad, unperforated, triangular, 5 of each sanding sheet, grits 80, 120, 180.

*Special order only

Mount	Part Number
SLM	3 52 22 946 01 0



Accessory Set Window Repair/Replacement* 23-piece accessory set with extensive selection especially for removal of old windows and replacement of sealant-embedded insulating glass panes. Attractive savings compared to individual purchase. Contents: 1 E-CUT Long-Life saw blade (203), 1 E-CUT Universal saw blade (152), 1 HSS saw blade for wood, bimetal, 4 in (100 mm) dia., 1 HSS-saw blade for metal, bimetal, 4 in (100 mm) dia., 1 depth stop, for use with all saw blades, 1 mushroom-shaped cutting blade (245), 1 segment saw blade

(244), 1 backing pad, unperforated, triangular, 5 of each sanding sheet, grits 80, 120, 180.

*Special order only

Mount	Part Number
SLM	3 52 22 946 02 0

Accessory Set Heating/ Plumbing Installation

9-piece accessory set with extensive selection especially for the most important applications in plumbing repairs. The same contents as the Professional-Set Heating / Plumbing Installation. Attractive savings compared to individual purchase. Contents: 1 each E-CUT Universal saw blades (type 151, 152), 1 diamond saw blade, segmented (type 243), 1 cutting blade, 1 scraper, long, rigid, 1 carbide rasp, triangular (4-5/16 in [110 mr]), 1 each grooming tools (type 246, 247, 248), 1 cutting blade (type 239).

Mount	Part Number
SLM	3 52 22 946 04 0

* FEIN original accessories also fit many other multifunction tools on the market. Further information at: www.fein.com/starlock

FEIN accessories for sanding.

The extensive FEIN accessory range of backing pads and sanding paper make additional sanding machines . There is no kickback effect at corners and edges due to the oscillation motion. The machines are easily guided. You always find the correct accessory for handling everything from the smallest cut-outs to large surfaces. From coarse to smooth finish, from everyday use to special tasks.

Your benefits:

STARLOCKPLUS

- From the smallest cutouts to large surfaces sanding with only one power tool.
- Extensive accessory range for all applications and materials.
- High removal rate, excellent finish pattern, minimal glazing and superb service life.
- ► Can also be used with dust extraction.



Sand flat material

Effortlessly, with excellent finish pattern and high removal rate – the sanding disc replaces additional sanding machines such as random orbit or pad sanders.




Dust-free working Highly effective dust extraction assemblies and matching FEIN vacuum cleaners pick up the dust reliably.



Paint defects/ gaps Special sandpaper in very fine grits are perfect for repairing paint defects and gaps.



Tight spaces Different backing pads reach even difficult sanding spots.

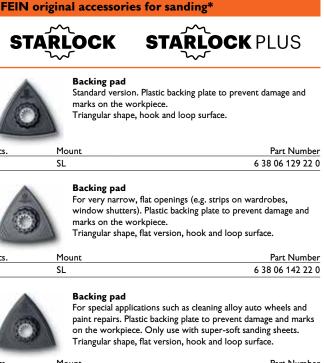

pcs.	Mount	Part Number
2	SL	6 38 06 141 22 0



Standard version for sanding with dust extraction. Plastic carrier plate to prevent damage and marks on the workpiece. Triangular shape, perforated version, H&L surface.

Qty pcs	Mount	Part Number
2	SL	6 38 06 136 22 0



Assorted sanding sheet set

50 sanding sheets in various grits for universal use from coarse to fine grinding on almost any material. Aluminum oxide and full resin bond guarantee fast material removal, minimum glazing and long tool life. Price includes: 10 of each type of sanding sheet (60, 80, 120, 180, 240 grit), unperforated, with hook and loop attachment. Savings compared to individual purchase.

Part Number	6 37 17 082 03 3



Assorted sanding sheet set

50 abrasive sheets in various grits for universal use from coarse to fine grinding on almost any material. Aluminum oxide and full resin bond guarantee fast material removal, minimum glazing and long tool life. Price includes: 10 of each type of sanding sheet (60, 80, 120, 180, 240 grit), perforated, for use with backing pad and dust extraction system, H&L attachment. Savings compared to individual purchase.

Part Number 6 37 17 109 03 5



Sanding sheets, zirconium

Unrivaled removal rate on extremely hard surfaces such as clear coats (e.g. parquet finishes) or metal. The sanding sheet for all floor covering work. Extremely durable paper quality due to extremely heavy, full resin bond with high quality zirconium aluminum oxide coating. Unperforated, hook and loop attachment.

Grit	pcs.	Part Number
40	35	6 37 17 243 01 0
60	35	6 37 17 244 01 0
80	35	6 37 17 245 01 0



Sanding sheets, super-soft

Special abrasive sheets for treatment of alloy auto rims, and repairs to dust embedments, paint runs, overspray on wood, plastic, metal, etc. Use only in combination with backing pad 6 38 06 141 02 6. Unperforated, hook and loop attachment.

Grit	pcs.	Part Number
240	50	6 37 17 126 01 5
320	50	6 37 17 127 01 9
400	50	6 37 17 128 01 7
500	50	6 37 17 179 01 6



Sanding sheets

Aluminum oxide and full resin bond guarantee fast material removal, minimum glazing and long tool life. For universal use on almost all materials. Unperforated, hook and loop attachment.

Grit	pcs.	Part Number
36	5	6 37 17 086 04 8
40	5	6 37 17 081 04 6
60	5	6 37 17 082 04 9
80	5	6 37 17 083 04 3
100	5	6 37 17 084 04 1
120	5	6 37 17 085 04 5
150	5	6 37 17 087 04 2
180	5	6 37 17 088 04 0
220	5	6 37 17 089 04 4
240	5	6 37 17 090 04 6
36	50	6 37 17 086 01 0
40	50	6 37 17 081 01 8
60	50	6 37 17 082 01 1
80	50	6 37 17 083 01 5
100	50	6 37 17 084 01 3
120	50	6 37 17 085 01 7
150	50	6 37 17 087 01 4
180	50	6 37 17 088 01 2
220	50	6 37 17 089 01 6
240	50	6 37 17 090 01 8



Sanding sheets "stone"

Specifically for sanding natural and artificial stone. For perfect surface finishing in fine finish, available up to 800 grit. Unperforated, hook and loop attachment.

Grit	pcs.	Part Number
40	50	6 37 17 120 01 4
80	50	6 37 17 121 01 3
120	50	6 37 17 122 01 6
220	50	6 37 17 123 01 0
320	50	6 37 17 124 01 8
400	50	6 37 17 125 01 2
600	50	6 37 17 175 01 7
800	50	6 37 17 176 01 0



Backing pad

For use in very narrow and hard-to-reach spots in channels, grooves, openings and rabbets. Also for mold-making, on curves and in slots. Plastic backing plate to prevent damage and marks on the workpiece. Finger shape, hook and loop surface.

Mount Part Number SL 6 38 06 159 22 0

* FEIN original accessories also fit many other multifunction tools on the market. Further information at: www.fein.com/starlock



Sanding sheets for sanding fingers

With Hook & Loop, full synthetic resin bonding, high performance, aluminum oxide. Applications, wood, metal, solder joints, GFRP, plastic, paint, filler and leather.

pcs.	Part Number
20	6 37 17 184 01 2
20	6 37 17 185 01 6
20	6 37 17 186 01 9
20	6 37 17 187 01 3
20	6 37 17 188 01 1
20	6 37 17 189 01 5
20	6 37 17 190 01 7
20	6 37 17 191 01 6
20	6 37 17 192 01 9
	20 20 20 20 20 20 20 20 20 20 20 20



Dust Extraction Set

2 backing pads, perforated, 5 of each sanding sheet, perforated, grits 60, 80, 120, 1 extraction cap with suction tube, 1 adapter, 2 felt seals. For MULTIMASTER FMM 350 Q/QSL.

Part Number

9 26 02 091 00 0

Dust Extraction Set 2 backing pads, perforated, 5 of each sanding sheet, perforated, grits 60, 80, 120, 1 extraction cap with suction tube, 2 hose adapters for 1-1/16 in (27 mm) dia. and 1-1/4 in (32 mm) dia. connections as well as 2 adapters for connection to popular household vacuum cleaners. FMM 250/250 Q, FMT 250/250Q, FMT 250 SL/250 QSL.

Part Number

Assorted large sanding sheet set 16 abrasive sheets in various grits for universal use from coarse to fine grinding on almost any material. Aluminum oxide and full resin bond guarantee fast material removal, minimum glazing and long tool life. Price includes: 4 of each sanding sheet for the large triangular backing pad (5-1/8 in [130 mm] edge length), grits 60, 80, 120, 180, perforated, for use with or without dust extraction system, hook and loop attachment. Savings compared to individual purchase.

> Part Number 3 52 22 952 10 0

> > Part Number

6 38 06 204 21 0

9 26 02 092 00 0



Large sanding pad set

For efficient sanding of edge, corner and medium-sized areas. The alternative to random orbit or pad sanders. No kickback on edges. Easy operation, excellent removal rate. Plastic carrier plate to prevent damage and marks on the workpiece. includes: 1 large perforated triangular backing pad (5-1/8 in [130 mm] edge length), 2 each perforated sanding sheets, grits 60, 80, 180.

SLP

Large sanding sheets, perforated

Fits large triangular electing pad with 5-1/8 in [130 mm] edge length. Aluminum oxide and full resin bond guarantee fast material removal, minimum glazing and long tool life. For universal use on almost all materials. Perforated, for use with perforated backing pad and dust extraction system, H&L attachment. Oty

Grit	pcs	Part Number
40	16	6 37 17 292 02 0
60	16	6 37 17 293 02 0
80	16	6 37 17 294 02 0
120	16	6 37 17 295 02 0
180	16	6 37 17 296 02 0
240	16	6 37 17 297 02 0



Large sanding sheets, zirconium

Fits large triangular electing pad with 5-1/8 in [130 mm] edge length. Unrivaled removal rate on extremely hard surfaces such as clear coats (e.g. parquet finishes) or metal. The sanding sheet for all floor covering work. Extremely durable paper quality due to extremely heavy, full resin bond with high quality zirconium aluminum oxide coating. Perforated, for use with perforated backing pad and dust extraction system, H&L attachment. (special order only)

	Qty	
Grit	pcs	Part Number
40	12	6 37 17 298 01 0
60	12	6 37 17 299 01 0
80	12	6 37 17 300 01 0



Large sanding sheet set, zirconium

12 sanding sheets with an unrivaled removal rate on extremely hard surfaces such as clear coats (e.g. parquet finishes) or metal. The sanding sheet for all floor covering work. Extremely durable paper quality due to extremely heavy, full resin bond with high quality zirconium aluminum oxide coating, 51%" (130 mm edge length). Price includes: 4 of each sanding sheet for the large triangular backing pad (130 mm edge length), grits 40, 60, 80, perforated, for use with or without dust extraction system, hook and loop attachment. Savings compared to individual purchase.

> Part Number 3 52 22 952 11 0



Sanding sheets, perforated

Aluminum oxide and full resin bond guarantee fast material removal, minimum glazing and long tool life. For universal use on almost all materials. Perforated, for use with perforated backing pad and dust extraction system, hook and loop attachment.

Grit	pcs.	Part Number
36	5	6 37 17 107 04 9
40	5	6 37 17 108 04 7
60	5	6 37 17 109 04 1
80	5	6 37 17 110 04 3
100	5	6 37 17 111 04 2
120	5	6 37 17 112 04 5
150	5	6 37 17 113 04 9
180	5	6 37 17 114 04 7
220	5	6 37 17 115 04 1
240	5	6 37 17 116 04 4

36	50	6 37 17 107 01 1
40	50	6 37 17 108 01 9
60	50	6 37 17 109 01 3
80	50	6 37 17 110 01 5
100	50	6 37 17 111 01 4
120	50	6 37 17 112 01 7
150	50	6 37 17 113 01 1
180	50	6 37 17 114 01 9
220	50	6 37 17 115 01 3
240	50	6 37 17 116 01 6



Sanding sheets, zirconium

Unrivaled removal rate on extremely hard surfaces such as clear coats (e.g. parquet finishes) or metal. The sanding sheet for all floor covering work. Extremely durable paper quality due to extremely heavy, full resin bond with high quality zirconium aluminum oxide coating. Perforated, for use with perforated backing pad and dust extraction system, hook and loop attachment.

Grit pcs. Part Number 40 35 6 37 17 236 01 0 60 35 6 37 17 237 01 0 80 35 6 37 17 238 01 0



Sanding disc set

For fast, efficient sanding of medium-sized areas. The alternative to random orbit or pad sanders. No kickback on edges. Easy operation, excellent removal rate. Can be used with or without dust extraction. Plastic backing plate to prevent damage and marks on the workpiece.

Round shape, perforated version, hook and loop surface. Price includes: 1 sanding disc 4-1/2 in (115 mm) dia., perforated, 2 sanding sheets 60, 80, 180 grit each, perforated

4-1/2	SLP	6 38 06 195 21 0
in	Mount	Part Number
Dia.		



Assorted sanding sheet set

16 sanding sheets in various grits for universal use from coarse to fine grinding on almost any material. Aluminum oxide and full resin bond guarantee fast material removal, minimum glazing and long tool life. Price includes: 4 of each type of Dia. 4-1/2 in (115 mm) sanding sheet (60, 80, 120, 180 grit), unperforated, for use with or without dust extraction system, hook and loop attachment. Savings compared to individual purchase.

Part Number	6 37 17 227 01 0
	Sanding sheets Aluminum oxide and full resin bond guarantee fast material removal, minimum glazing and long tool life. For universal use

Aluminum oxide and full resin bond guarantee fast material removal, minimum glazing and long tool life. For universal use on almost all materials. Dia. 4-1/2 in (115 mm), perforated, for use with or without dust extraction system, hook and loop attachment.

Grit	pcs.	Part Number
40	16	6 37 17 230 02 0
60	16	6 37 17 227 02 0
80	16	6 37 17 228 02 0
120	16	6 37 17 229 01 0
180	16	6 37 17 231 02 0
240	16	6 37 17 232 01 0



Sanding sheets, zirconium

Unrivated removal rate on extremely hard surfaces such as clear coats (e.g. parquet finishes) or metal. The sanding sheet for all floor covering work. Extremely durable paper quality due to extremely heavy, full resin bond with high quality zirconium aluminum oxide coating. Dia. 4-1/2 in (115 mm), perforated, for use with or without dust extraction system, hook and loop attachment.

Grit	pcs.	Part Number
40	12	6 37 17 233 01 0
60	12	6 37 17 234 01 0
80	12	6 37 17 235 01 0



Sanding sheet set, zirconium

12 sanding sheets with an unrivaled removal rate on extremely hard surfaces such as clear coats (e.g. parquet finishes) or metal. The sanding sheet for all floor covering work. Extremely durable paper quality due to extremely heavy, full resin bond with high quality zirconium aluminum oxide coating. Price includes: 4 of each type of Dia. 4-1/2 in (115 mm) sanding sheet (40, 60, 80 grit), perforated, for use with or without dust extraction system, hook and loop attachment. Savings compared to individual purchase.

Part Number

6 37 17 233 02 0



Profile Sanding Set

22-piece set for sanding in grooves and on external radii. Contents: 1 holder with 6 different profile inserts. 1× V-shape for 90° angles, 1× trapezoid shape for tongue and groove joints, 1× straight shape for profiles, 1× convex shape (large), 1× concave and 1× convex shape (small), together with 5 of each sanding sheet. grits 80, 120, and 180.

> Part Number 6 38 10 031 01 0



Sandpaper for Profile Sanding Set

Aluminum oxide and full resin bond guarantee fast material removal, minimum glazing and long tool life. For universal use on almost all materials, unperforated.

Grit	Qty pcs	Part Number
80	25	6 37 17 217 01 6
120	25	6 37 17 218 01 4
180	25	6 37 17 219 01 8



Best of Sanding Accessory Set

61-piece accessory set for all sanding at corners and edges and medium to large areas in a practical plastic storage case. Attractive savings compared to individual purchase. Contents: 1 triangular backing pad, unperforated, with 10 of each sanding sheet, grits 16, 80, 120, 180, 1 backing pad 4-1/2 in [115 mm] dia., with six of each sanding sheet, grits 60, 80, 180, 1 triangular carbide rasp. (special order only)

Mount	Part Number
SLP	3 52 22 942 04 0

FEIN original accessories for sanding*



Dust Extraction Set

2 backing pads, perforated, 5 of each sanding sheet, perforated, grits 60, 80, 120, 1 extraction cap with suction tube, 1 adapter, 1 felt seal.

For FEIN SUPERCUT FSC 500 QSL

Mount SLM Part Number 9 26 02 095 00 0



* FEIN original accessories also fit many other multifunction tools on the market. Further information at: www.fein.com/starlock SL = Starlock | SLP = StarlockPlus | SLM = StarlockMax

FEIN TURBO: powerful, reliable, mobile.

The new standard in dust extraction. Now with compact and premium classes

Lightweight, incredibly powerful and versatile – the new FEIN TURBO vacuum cleaners set standards in the compact class. Due to their compact size, they ensure effective dust extraction from power tools and clean workplaces, in the shop and on-site.

Tubo I, Turbo II and Turbo II HEPA

Model	TURBO I TURBO I set		TURBO II	TURBO II set	Turbo II HEPA*	Turbo II HEPA Set *
Weight according to EPTA**	17.9 lbs	s (8.1 kg)	20.1 lbs (9.1 kg)			
Max. power consumption	1,100 w	vatts (9A)	1,100 watts (9A)			
Air volume (at blower)	151 cfm	n (71 L/s)		151 cfm (71 L/s)		
Vacuum	98.4 static wate	er lift (245 mbar)		98.4 static wate	r lift (245 mbar)	
Container volume	5.8 ga	ıl (22 I)	8.4 gal (32 l)			
Sound pressure level	67 dB (A)		67 dB (A)			
Price includes:	1 suction hose 13 ft, 1 3/8 in dia, 1 tool coupling with suction control, 1 non-woven filter bag, 1 cellulose flat pleated filter	1 suction hose 13 ft, 1 3/8 in dia., 1 tool coupling with suction control, 1 non-woven filter bag, 1 cellulose flat pleated filter, 2 metal suction tubes, 1 combination tool with interchangeable inserts, 1 crevice nozzle, 1 dusting brush, 1 elbow	1 suction hose 13 ft, 1 3/8 in dia., 1 tool coupling with suction control, 1 non-woven filter bag, 1 cellulose flat pleated filter	1 suction hose 13 ft, 1 3/8 in dia., 1 tool coupling with suction control, 1 non-woven filter bag, 1 cellulose flat pleated filter, 2 metal suction tubes, 1 combination tool with interchangeable inserts, 1 crevice nozzle, 1 dusting brush, 1 elbow	1 suction hose 13 ft, 1 3/8 in dia., 1 tool coupling with suction control, 1 non-woven filter bag, 1 HEPA filter, 2 metal suction tubes, 1 combination tool with interchangeable inserts, 1 crevice nozzle, 1 dusting brush, 1 elbow	1 suction hose 13 ft, 1 3/8 in dia, 1 tool coupling with suction control, 1 non-woven filter bag, 1 HEPA filter
Order number	9 20 27 236 09 0	9 20 27 060 09 0	9 20 28 236 09 0	9 20 28 060 09 0	9 20 28 236 99 0	9 20 28 060 99 0

Turbo II X, Turbo II X AC and Turbo II X AC HEPA					
Model	Turbo II X	Turbo II X AC	TURBO II X AC HEPA*		
Fully automatic filter cleaning	-	▲	A		
Weight according to EPTA**	31 lbs (14 kg)	31 lbs (14 kg)	31 lbs (14 kg)		
Max. power consumption	1100 watts (9A)	1100 watts (9A)	1100 watts (9A)		
Air volume (at blower)	151 cfm (71 L/s)	151 cfm (71 L/s)	151 cfm (71 L/s)		
Vacuum	151 cfm (245 mbar)	151 cfm (245 mbar)	151 cfm (245 mbar)		
Container volume	8.4 gals (35 l)	8.4 gals (35 l)	8.4 gals (35 l)		
Sound pressure level	69 dB (A)	69 dB (A)	69 dB (A)		
Price includes:	1 push handle, 1 flat pleated filter PES, 1 fleece filter bag, 1 suction hose 13 ft, 1 3/8 in dla., 1 tool coupling with suction control, 1 step adapter, 1 elbow, 2 suction tubes, 1 combination tool with interchangeable inserts, 1 crevice nozzle, 1 dusting brush	1 push handle, 1 flat pleated filter PES, 1 disposal bag, 1 suction hose 13 ft, 1 3/8 in dia., 1 tool coupling with suction control, 1 step adapter, 1 elbow, 2 suction tubes, 1 combination tool with interchangeable inserts, 1 crevice nozzle, 1 dusting brush	1 push handle, 1 flat pleated filter HEPA, 1 fleece filter bag, 1 suction hose 13 ft, 1 3/8 in dia., 1 tool coupling with suction control, 1 step adapter, 1 elbow, 2 suction tubes, 1 combination tool with interchangeable inserts, 1 crevice nozzle, 1 dusting brush		


Order number

9 20 29 060 09 0

9 20 30 060 09 0



All of the HEPA units captures and retains a rating higher than the standard 99.97% of all contaminants down to 0.3 microns in particulate size. The FEIN Turbo II X AC HEPA rates with an efficiency of 99.99% in





Protects the respiratory tracts, the accessories and the pocketbook. The automatic cleaning process increases filter service life and reduces your ongoing operating costs.

9 20 30 060 99 0

* HEPA models independently tested by LMS Technologies and are HEPA Full Unit Certified. ** (EPTA) European Power Tool Association

VACUUM CLEANER ACCESSORIES





Order number 3 13 45 012 01 0

Flat pleated filter PES Nano-coated, for wet and dry use



Order number 3 13 45 059 01 0

HEPA flat pleated filter Special filter



HEPA flat pleated filter Special filter for use with Turbo II X AC



3 13 45 274 01 0

Permanent filter Replaces non-woven filter bag. For TURBO I / II



3 13 45 064 01 0

Non-woven filter bag Holds $2-3 \times$ more dust than paper filter bags, high tear resistance. 5 pack



Order number 3 13 45 061 01 0 Order number

Turbo II 3 13 45 062 01 0



Order number

Suction hose

1-1/16 in dia. 3 13 45 065 01 0 Order number 1-3/8 in dia 3 13 45 066 01 0

Suction hose Electrostatically conductive



Length 13 ft Order number

3 13 45 121 01 0 1-1/16 in dia. Order number 1-3/8 in dia 3 13 45 120 01 0

Extension hose



Length 8.2 ft Order number 1-1/16 in dia. 3 13 45 067 01 0 Order number 1-3/8 in dia 3 13 45 068 01 0

Repair kit Power tool end, fits 35 mm dia. suction hose



3 13 45 069 01 0

Elbow With clip system, fits 1-1/16 in dia. and 1-3/8 in dia. suction hose



Order number 3 13 45 070 01 0





For TURBO IL 3 pack

HEPA filter bag

For abrasive dusts.



Order number 3 13 45 130 01 0

Non-woven filter bag, premium Reinforced seams for fine and abrasive dusts. For TURBO II /LX/MX. 5 pack



Order number 3 13 45 251 01 0

Suction tube 2-piece, chrome-plated metal



Order number 3 13 45 071 01 0

Floor nozzle Convertible, with stainless steel sliding surface and bristles on



Order number 3 13 45 072 01 0

Combination nozzle For wet and dry work, with interchangeable rubber blades and brush strips, 12 in.



Order number 3 13 45 073 01 0 Aluminum combination tool



Order number 3 13 45 137 01 0

Crevice nozzle For corners and grooves, 9-27/32 in



Upholstery nozzle With brush strips, 5-1/32 in



Order number 3 13 45 075 01 0

Dusting brush Rotates, with natural bristles, bristle edging 2-3/4 x 1-3/4 in



Order number 3 13 45 076 01 0

Vacuum brush Natural bristles, bristle edging 4-3/4 x 1-3/4 in



Order number 3 13 45 077 01 0

Tool coupling with suction control Power tool end



Order number 1-1/2 in dia 3 13 45 123 01 0

Tool coupling with suction control

Electrically conductive, power tool end



Order number 1-1/16 in dia 3 13 45 250 01 0

Cable holder For attaching cable to suction hose, fits 1-1/16 and 1-3/8 in dia. suction hoses



Order number 3 13 45 119 01 0

Step adapter 4 steps, to adapt to the required diameter with clip system



Order number 3 13 45 079 01 0

Disposal bag Recommended for AC models. 5 pack



Order number 3 13 45 063 01 0

Accessory set for FEIN vacuum cleaners Consisting of: 2 metal suction tubes, 1 combination tool with interchangeable inserts, 1 crevice nozzle, 1 dusting brush, 1 elbow



Order number 3 13 45 071 02 0

3 13 45 263 01 0

FEIN accessories for removing grout and rasping.

For many indoor and outdoor restoration or renovation jobs, the FEIN accessory range for removing grout and rasping offers everything from a single source. Renew floor coverings, replace tiles, re-grout or cleaning – numerous accessories geared especially to these applications enable efficient work. That saves time-consuming and strenuous manual work. The advantage compared to normal methods: The oscillation motion produces less dirt.

Your benefits:

- The highest material quality for outstanding service life and perfect results.
- Powerful system, also suitable for hard joining materials and demanding tasks.
- Enables efficient, total restoration as well as very cost-effective local repairs.

Replace tiles

Tile grout can be cut out efficiently with the carbide and diamond saw blades. For local repair of individual damaged tiles right into the corner or complete renovation of larger areas.



TARLOCKPLUS

Clean joints The cost-effective alternative to re-grouting. Fast and efficient without large amounts of dirt.



For tight spots The carbide file is ideal for rough grinding of channels, grooves, openings and rabbets.



Rasp thin set The all-around talent: The carbide rasp smooths tile adhesive and ensures a flat substrate.

REMOVING GROUT AND RASPING ACCESSORIES





Carbide saw blade

For removal of defective tile grout. Also for cutting slots in plaster, porous concrete and similar construction materials and for cleaning and reworking planked deck joints. Not suitable for very hard epoxy or cement grouts. The economical alternative to diamond blades.

Segmented, ideal for working in corners and on edges without over cut. Kerf approx. 3/32 in (2.2 mm)

Dia.			
in (mm)	pcs.	Mount	Part Number
3 (75)	1	SL	6 35 02 118 21 0
3 (75)	5	SL	6 35 02 118 23 0
3-9/16 (90)	1	SLP	6 35 02 169 21 0
3-9/16 (90)	5	SLP	6 35 02 169 23 0



Carbide saw blade

For removal of defective tile grout. Also for cutting slots in plaster, porous concrete and similar construction materials and for cleaning and reworking planked deck joints. Not suitable for very hard epoxy or cement grouts. The economical alternative to diamond blades.

Extra thin version. Kerf approx. 3/64 in (1.2 mm) Segmented, ideal for working in corners and on edges without over cut.

Dia.			
in (mm)	pcs.	Mount	Part Number
3 (75)	1	SL	6 35 02 125 21 0
3 (75)	5	SL	6 35 02 125 23 0
3-9/16 (90)	1	SLP	6 35 02 170 21 0
3-9/16 (90)	5	SLP	6 35 02 170 23 0



Diamond saw blade

For the removal of marble, epoxy resin and pozzolan grouts. Outstanding tool life. Also suitable for very hard epoxy or cement grouts. The right choice for frequent use and demanding tasks.

Segmented, ideal for working in corners and on edges without over cut. Kerf approx. 3/32 in (2.2 mm)

Dia. in (mm)	pcs.	Mount	Part Number
3 (75)	1	SL	6 35 02 114 21 0
3 (75)	5	SL	6 35 02 114 23 0
3-9/16 (90)	1	SLP	6 35 02 166 21 0
3-9/16 (90)	5	SLP	6 35 02 166 23 0



Diamond saw blade

For the removal of marble, epoxy resin and pozzolan grouts. Outstanding tool life. Also suitable for very hard epoxy or cement grouts. The right choice for frequent use and demanding tasks.

Extra thin version. Kerf approx. 3/64 in (1.2 mm) Segmented, ideal for working in corners and on edges without over cut.

Dia.			
in (mm)	pcs.	Mount	Part Number
3 (75)	1	SL	6 35 02 216 21 0
3 (75)	5	SL	6 35 02 216 23 0
3-9/16 (90)	1	SLP	6 35 02 217 21 0
3-9/16 (90)	5	SLP	6 35 02 217 23 0



Carbide rasp

For coarse grinding of filler material, tile adhesive, concrete, stone, and wood. Triangular shape, 3-1/8 in (80 mm) edge length, perforated, can also be used with dust extraction.

nt	Part Number
	6 37 31 001 21 0



Mour SL

Carbide rasp

For coarse grinding of filler material, tile adhesive, concrete, stone, and wood. For use in very narrow and hard-to-reach spots in channels, grooves, openings and rabbets. Also for moldmaking, on curves, in slots and artistic work. Finger shape, coated on both sides.

Mount	Part Number
SLP	6 37 31 002 21 0



Tile grout cleaner

For fast, cost-effective cleaning of heavily soiled tile grout. The alternative to time-consuming complete renovation. Suitable for all joint widths.



Cleaning block

Rhombus block for cleaning carbide-tipped and diamond-coated accessories.

Part Number

6 37 19 007 01 0

Part Number

6 37 19 011 22 0



Best of Tile Work accessory kit*

3-piece accessory set for plumbing renovation and restoration work in a practical plastic storage case. Attractive savings compared to individual purchase. Contents: 1 triangular carbide rasp,

1 diamond saw blade, segmented, 3-9/16 in (90 mm) dia., 1 carbide saw blade, 3-9/16 in (90 mm) dia., segmented, extra thin.

*Special order only

Part Number 3 52 22 942 07 0



Mount

SLP

Carbide file

For deburring and filing CFRP/fiberglass materials, plastics, and wood. Particularly suitable for small cutouts.

Length	Width		
in (mm)	in (mm)	Mount	Part Number
1-3/16 (30)	3/8 (10)	SLP	6 37 06 019 21 0



Ideal combination for small cutouts and work in tight spots.

For example, many installation jobs, switch installation, model building and much more.

Price includes: 1 each E-CUT Long-Life (184) saw blade 3/8 in (10 mm) and (183) 13/16 in (20 mm), 1 carbide file (019) 3/8 in (10 mm)

Mount	Part Number
SLP	3 52 22 952 02 0

FEIN original accessories for removing grout and rasping*





Carbide saw blade

For the removal of marble, epoxy resin and pozzolan grouts. Not suitable for very hard epoxy or cement grouts. The economical alternative to diamond blades. Kerf, approx. 3/32 in (2.2 mm)

Dia.			
in (mm)	pcs.	Mount	Part Number
4-1/8 (105)	1	SLM	6 35 02 213 21 0
4-1/8 (105)	5	SLM	6 35 02 213 23 0

Carbide saw blade

For removal of very narrow marble, epoxy resin and pozzolan grouts. Not suitable for very hard epoxy or cement grouts. The economical alternative to diamond blades. Extra thin version. Kerf approx. 3/64 in (1.2 mm)

in (mm)	pcs.	Mount	Part Number
4-1/8 (105)	1	SLM	6 35 02 214 21 0
4-1/8 (105)	5	SLM	6 35 02 214 23 0

Carbide saw blade

For the removal of marble, epoxy resin and pozzolan grouts. Not suitable for very hard epoxy or cement grouts. The economical alternative to diamond blades. Segmented, ideal for working in corners and on edges without over cut.

Kerf approx. 3/32 in (2.2 mm)

pcs.	Mount	Part Number
1	SLM	6 39 03 241 21 0
5	SLM	6 39 03 241 23 0

Carbide saw blade

For removal of very narrow marble, epoxy resin and pozzolan grouts. Not suitable for very hard epoxy or cement grouts. The economical alternative to diamond blades. Extra thin version. Kerf approx. 3/64 in (1.2 mm) Segmented, ideal for working in corners and on edges without over cut.

lucal loi	WOLKING III	conners ai	ia on cages	cut.

pcs.	Mount	Part Number
1	SLM	6 39 03 240 21 0
5	SLM	6 39 03 240 23 0



Diamond saw blade

For the removal of marble, epoxy resin and pozzolan grouts. Outstanding tool life. Also suitable for very hard epoxy or cement grouts. The right choice for frequent use and demanding tasks.

Kerf, approx. 3/64 in (1.2 mm)

in (mm)	pcs.	Mount	Part Number
4-1/8 (105)	1	SLM	6 35 02 218 21 0
4-1/8 (105)	5	SLM	6 35 02 218 23 0



Diamond saw blade

For the removal of marble, epoxy resin and pozzolan grouts. Outstanding tool life. Also suitable for very hard epoxy or cement grouts. The right choice for frequent use and demanding tasks.

Extra thin version. Kerf approx. 3/64 in (1.2 mm).

Dia. in (mm)	pcs.	Mount	Part Number
4-1/8 (105)	1	SLM	6 35 02 219 21 0
4-1/8 (105)	5	SLM	6 35 02 219 23 0



Diamond saw blade

For the removal of marble, epoxy resin and pozzolan grouts. Outstanding tool life. Also suitable for very hard epoxy or cement grouts. The right choice for frequent use and demanding tasks.

Segmented, ideal for working in corners and on edges without over cut. Kerf approx. 3/32 in. (2.2 mm)

s.	Mount	Part Number
	SLM	6 39 03 243 21 0
	SLM	6 39 03 243 23 0



1

Diamond saw blade

For the removal of marble, epoxy resin and pozzolan grouts. Outstanding tool life. Also suitable for very hard epoxy or cement grouts. The right choice for frequent use and demanding tasks.

Extra thin version. Kerf approx. 3/64 in (1.2 mm) Segmented, ideal for working in corners and on edges without over cut.

pcs.	Mount	Part Number
1	SLM	6 39 03 242 21 0
5	SLM	6 39 03 242 23 0

The FEIN Accessory Highlights:



Segment saw blades: Special accessory for the FEIN SUPERCUT, ideal for local repairs. They are superb for cutting out damaged tile grout in corners without overcuts due to the segmentation. Available in various widths, also for very thin tile joints.

In diamond quality with long service life and for very hard grout materials such as waterproof epoxy resin grouts in swimming pools.

The segmented carbide saw blade is the cost-effective alternative for easy removal of damaged tile grout and cutting slots in plaster, porous concrete and similar construction materials.



REMOVING GROUT AND RASPING ACCESSORIES



Cleaning block

Rhombus block for cleaning carbide-tipped and diamond-coated accessories.

Part Number	6 37 19



Carbide rasp

For coarse grinding of filler material, tile adhesive, concrete, stone, and wood. For especially fast work progress and efficient processing of several square meters. Triangular shape, large version, 4-5/16 (110 mm) in edge length, perforated, can also be used with dust extraction.

 Mount
 Part Number

 SLM
 6 37 31 006 21 0



Recess tool

For groove cutting in rigid foam panels for 1/2 in (12 mm) and 3/4 in (20 mm) hot water tubes as well as conduits for electrical installation. Automatic securing of the installed conduits. Easy, fast and secure application. StarlockMax mount suitable for every multifunction tool with an appropriate mount. Also includes adapter for every FEIN

an appropriate mount. Also includes adapter for every SUPERCUT before 04/16.

	Width	Immersion dia.	
pcs.	in (mm)	in (mm)	Part Number
2	2 (50)	7/8 (22)	6 39 03 246 22 0



Recess tool

For groove cutting in rigid foam panels for electrical conduit, wall and in-floor heating. StarlockMax mount suitable for every multifunction tool with

an appropriate mount. Also includes adapter for every FEIN SUPERCUT before 04/16.

	Width	Cutting width	Cutting depth	
pcs.	in (mm)	in (mm)	in (mm)	Part Number
2	2 (50)	1/2 (12)	1/4 (6.5)	6 39 03 247 22 0



Recess tool

For groove cutting in rigid foam panels for electrical cables. StarlockMax mount suitable for every multifunction tool with an appropriate mount. Also includes adapter for every FEIN SUPERCUT before 04/16.

	Width	Immersion dia.	
pcs.	in (mm)	in (mm)	Part Number
2	2 (50)	1/2 (12)	6 39 03 248 22 0



007 01 0

Accessory Set Tile/ Bathroom Renovation* 8-piece accessory set with extensive selection especially for flawless removal of tiles and removal of tile grout during bathroom renovation. Attractive savings compared to individual purchase. Contents: 1 each E-CUT Universal saw blades (type 151, 152), 1 carbide saw blade 4-1/8 in (105 mm) dia. (type 214), 1 diamond saw blade, segmented (type 243), 1 mushroomshaped cutting blade (type 245), 1 long scraper rigid, 1 each carbide rasps, triangular (3-1/8 in (80 mm), 4-5/16 in (110 mm). *Special order only

Mount	Part Number
SLM	3 52 22 946 03 0

FEIN accessories for cutting and scraping.

Adhesive residues, old floor coverings, coatings such as underseal, soft putty, permanently resilient joint material – these are just a few of the many materials where the FEIN system reaches its full potential in removal and renewal. Like all FEIN original accessories, FEIN accessories for cutting and scraping are developed to match the assignment perfectly and, in combination with FEIN oscillating power tools, provide fast, efficient application solutions in the most diverse areas. This is true for both easy tasks and tough, continuous daily use.

Your benefits:

- FEIN original accessories for perfect results and maximum tool life.
- Perfect coordination of powerful, highly adaptable oscillating power tools and matching accessories for efficient work under all conditions.
- ► Unique FEIN accessories for universal use as much as for very special applications solutions.

Scraping

Remove adhesive residue and coatings quickly, efficiently and completely. **Refinish planked decks** Planked deck joint materials are removed completely and up to 80% faster with the cutting blade. **Cut floor coverings** The HSS circular blade is ideal for long, straight cuts to remove old floor coverings.



Remove sealants Elastic sealants can be removed completely before resealing.

STAR	\sim .	\sim
- 21 MU	LOCK STAI	RLOCK PLUS
~ ~		~
(AND A	Rigid scraper blade Short version. For removal of	stubborn paint, adhesive residue,
	carpet, tile adhesive, and under	rseal.
lount		Part Number
SL		6 39 03 226 21 0
0	Rigid scraper blade Long version. For removal of s carpet, tile adhesive, and under	tubborn paint, adhesive residue, rseal.
Mount		Part Number
SLP		6 39 03 234 21 0
0	Flexible scraper blade Short version. For removal of plumbing work as well as stick	
Mount		Part Number
5L		6 39 03 165 21 0
Care.	Cutter blade	
-0	Cutter blade Hooked blades for cutting out rapidly and safely. Ideal for pro structures, rails, gunwales, clea	planked deck caulk materials oblem locations such as cabin
	Hooked blades for cutting out rapidly and safely. Ideal for pro structures, rails, gunwales, clea	planked deck caulk materials blem locations such as cabin ts and curves.
n (mm)	Hooked blades for cutting out rapidly and safely. Ideal for pro structures, rails, gunwales, clea Mount	planked deck caulk materials blem locations such as cabin ts and curves. Part Number
n (mm) 1/8 (3)	Hooked blades for cutting out rapidly and safely. Ideal for pro structures, rails, gunwales, clea <u>Mount</u> SLP	planked deck caulk materials blem locations such as cabin ts and curves. Part Number 6 39 03 200 21 0
n (mm) 1/8 (3) 3/16 (4)	Hooked blades for cutting out rapidly and safely. Ideal for pro structures, rails, gunwales, clea <u>Mount</u> SLP SLP	planked deck caulk materials blem locations such as cabin ts and curves. Part Number 6 39 03 200 21 0 6 39 03 201 21 0
n (mm) //8 (3) 8/16 (4) 7/32 (5)	Hooked blades for cutting out rapidly and safely. Ideal for pro structures, rails, gunwales, clea Mount SLP SLP SLP	planked deck caulk materials blem locations such as cabin ts and curves. Part Number 6 39 03 200 21 0 6 39 03 201 21 0 6 39 03 202 21 0
n (mm) 1/8 (3) 3/16 (4) 7/32 (5)	Hooked blades for cutting out rapidly and safely. Ideal for pro structures, rails, gunwales, clea <u>Mount</u> SLP SLP	planked deck caulk materials blem locations such as cabin ts and curves. Part Number 6 39 03 200 21 0 6 39 03 201 21 0
n (mm) 1/8 (3) 3/16 (4) 7/32 (5)	Hooked blades for cutting out rapidly and safely. Ideal for pro structures, rails, gunwales, clea Mount SLP SLP SLP	planked deck caulk materials blem locations such as cabin ts and curves. Part Number 6 39 03 200 21 0 6 39 03 201 21 0 6 39 03 202 21 0
n (mm) 1/8 (3) 3/16 (4) 7/32 (5)	Hooked blades for cutting out rapidly and safely. Ideal for pro structures, rails, gunwales, clea Mount SLP SLP SLP SLP Cutter blade Mushroom-shaped cutting blac	planked deck caulk materials oblem locations such as cabin ts and curves. Part Number 6 39 03 200 21 0 6 39 03 201 21 0 6 39 03 202 21 0 6 39 03 233 21 0
n (mm) 1/8 (3) 3/16 (4) 7/32 (5) 1/4 (6)	Hooked blades for cutting out rapidly and safely. Ideal for pro structures, rails, gunwales, clea Mount SLP SLP SLP Cutter blade Mushroom-shaped cutting blac glazing compound as well as se	planked deck caulk materials blem locations such as cabin ts and curves. Part Number 6 39 03 200 21 0 6 39 03 201 21 0 6 39 03 202 21 0 6 39 03 233 21 0 le, for cutting silicone and soft eparation of insulating glass units.
n (mm) /8 (3) //16 (4) //32 (5) /4 (6) // (6)	Hooked blades for cutting out rapidly and safely. Ideal for pro structures, rails, gunwales, clea Mount SLP SLP SLP SLP Cutter blade Mushroom-shaped cutting blac	planked deck caulk materials oblem locations such as cabin ts and curves. Part Number 6 39 03 200 21 0 6 39 03 201 21 0 6 39 03 202 21 0 6 39 03 233 21 0 le, for cutting silicone and soft
Blade width in (mm) 1/8 (3) 3/16 (4) 7/32 (5) 1/4 (6) 000 000 000 000 000 000 000	Hooked blades for cutting out rapidly and safely. Ideal for pro- structures, rails, gunwales, clea Mount SLP SLP SLP Cutter blade Mushroom-shaped cutting blac glazing compound as well as se Mount SL HSS circular blade	planked deck caulk materials blem locations such as cabin ts and curves. Part Number 6 39 03 200 21 0 6 39 03 201 21 0 6 39 03 202 21 0 6 39 03 233 21 0 le, for cutting silicone and soft sparation of insulating glass units. Part Number
in (mm) 1/8 (3) 3/16 (4) 7/32 (5) 1/4 (6) 0 0 0 0 0 0 0 0 0 0 0 0 0	Hooked blades for cutting out rapidly and safely. Ideal for pro- structures, rails, gunwales, clea Mount SLP SLP SLP Cutter blade Mushroom-shaped cutting blac glazing compound as well as se <u>Mount</u> SL HSS circular blade For universal cutting work in le cork, etc.	planked deck caulk materials oblem locations such as cabin ts and curves. Part Number 6 39 03 200 21 0 6 39 03 201 21 0 6 39 03 202 21 0 6 39 03 233 21 0 e, for cutting silicone and soft of insulating glass units. Part Number 6 39 03 245 23 0 eather, plastic films, roofing felt,
n (mm) /8 (3) //16 (4) //32 (5) //4 (6) 	Hooked blades for cutting out rapidly and safely. Ideal for pro- structures, rails, gunwales, clea Mount SLP SLP SLP Cutter blade Mushroom-shaped cutting blac glazing compound as well as se Mount SL HSS circular blade For universal cutting work in lea	planked deck caulk materials blem locations such as cabin ts and curves. Part Number 6 39 03 200 21 0 6 39 03 201 21 0 6 39 03 202 21 0 6 39 03 233 21 0 le, for cutting silicone and soft sparation of insulating glass units. Part Number 6 39 03 245 23 0

FEIN origina	al accessories for cutting and scr	aping*
	STARLOCK MAX	
	Cutter blade Universal blade for almost all expansion joints Straight type. Width 1-3/16 in (30 mm) cutting depth 2-3/8 in (60 mm)	
pcs.	Mount	Part Number
5	SLM	6 39 03 236 23 0
	Diamond cleaning blade For cleaning joint walls before installation of n Straight type. Width 1-15/64 in (31 mm) cutting depth 2-3/8 in (60 mm)	ew sealant.
pcs.	Mount	Part Number
1	SLM	6 39 03 237 21 0
5	SLM	6 39 03 237 23 0
	Cutter blade Straight, long shape for deep joints.	
pcs.	Mount	Part Number
1	SLM	6 39 03 238 21 0
	Cutter blade Straight, very long shape for deep joints.	
pcs.	Mount	Part Number
5	SLM	6 39 03 239 23 0
	Cleaning block Square block for cleaning carbide-tipped and c accessories.	liamond-coated
Part Number		6 37 19 007 01 0
8.	Dust extraction device For cutting and sawing applications with diamo accessories or E-CUT saw blades. Fits FEIN SU QSL and AFSC 18 QSL.	
Part Number		3 21 33 021 01 0
0	Accessory handle For improved handling of the FSC 500 QSL du Can also be used in combination with extracti 021 01 0.	
Part Number		3 21 19 148 01 0
ALC: NO		1000



* FEIN original accessories also fit many other multifunction tools on the market. Further information at: www.fein.com/starlock SL = Starlock | SLP = StarlockPlus | SLM = StarlockMax

FEIN accessories for cleaning and polishing.

Cleaning, restoring, polishing and protecting - the FEIN accessory range for surface treatment offers everything from the finest finish to mirror finish to give furniture, boats and vehicles a new shine once again. In conjunction with the FEIN oscillating power tools, the system has the ideal speed range and maximum speed stability for efficient overall preparation and maintenance of metals, paints, gelcoat layers, plastics, stone products and many other smooth surfaces.

Your benefits:

- Professional maintenance and restoration of most smooth surfaces.
- ► Extremely powerful and ergonomic even in continuous use.
- Extensive range of accessories for the most varied tasks.



Polishing Old shine returns with the felt polishing pad and FEIN polish.



Scratch removal Special sanding sheets create the basis for perfect surfaces.



Cleaning The bristle fleece in combination with a boat cleaner ensures thorough cleaning of GFRP surfaces with anti-slip structures.

CLEANING AND POLISHING ACCESSORIES

FEIN original accessories for cleaning and polishing

STARLOCK STA

Bristle fleece Bristle fleece fo

Bristle fleece for cleaning boat decks or cleaning/polishing antislip structures.

OCK PLUS

pcs.	Part Number
2	6 37 23 031 01 0



Felt polishing pad

For polishing metal parts, as well as polishing and decorative polishing of stone and stone products. Gelcoat layers on boats can also be polished. Plastic backing plate to prevent damage and marks on the workpiece.

Material-specific polishing products are available from specialized dealers.

pcs.	Mount	Part Number
2	SL	6 38 06 140 22 0



pc

5

Felt polishing fleece

Felt polishing fleece for polishing boat decks (gelcoat), chrome, stainless steel, aluminum, non-ferrous metals.

Part Number 6 37 23 032 01 0



Felt polishing fleece

4-1/2 in (115 mm) dia., with hook and loop attachment. Multiple uses. For polishing chrome, stainless steel, polycarbonate materials, gel coat boat decks, buffing out paint scratches and removal of heat discoloration on exhausts.

<u>pcs.</u> Part Number 5 6 37 23 036 01 0



Sanding sheets, foam backing*

For removing scratches from paints, gel coat, acrylic and polycarbonate windows, clear-finished wood, furniture and much more. For the highest possible surface quality. Dia. 4-1/2 in (115 mm) with foam lamination, hook and loop attachment. The perfect precursor to polishing with felt polishing pad and polish.

*Special order only

pcs.	Grit	Part Number
5	500	6 37 17 246 01 0
5	1 000	6 37 17 247 01 0



* FEIN original accessories also fit many other multifunction tools on the market. Further information at: www.fein.com/starlock SL = Starlock | SLP = StarlockPlus | SLM = StarlockMax

Model

The ideal combination: FEIN cordless drill/drivers.

FEIN professional combos are machine sets that compliment each other perfectly in their area of application. Everything you need for your work is always available in a durable plastic case: two high-performance machines, two powerful li-ion batteries and a charger. This saves space, weight and provides significant savings compared to individual purchases.



7 19 01 261 09 0

1 AFMT 12 QSL, 1 ASCM 12 C, 2 Li-ion batteries (12 V, 2.5 Ah), 1 Rapid charger ALG 50, 1 Plastic carrying case

AFMT 12 QSL + ABSU 12 C



7 19 01 361 09 0

1 AFMT 12 QSL, 1 ABSU 12 C, 2 Li-ion batteries (12 V, 2.5 Ah), 1 Rapid charger ALG 50, 1 Plastic carrying case

Professional Combo Sets - FEIN MULTITALENT



	Cordless MultiTalent AFMT 12 QSL
Tool mount	StarlockPlus*
Tool change	QuickIN
Vibration decoupling	
Electronic speed setting	
Tacho generator	
Softgrip zone	
Oscillations	11,000-18,000 rpm
Weight [according to EPTA]	3.3 lbs (1.5 kg)
Battery voltage	12 Volts
Battery capacity	2.5 Ah

Professional Combo Sets - Drill Drivers			
Model	ASCM 12 C	ABSU 12 C	
	4-speed cordless drill/driver ASCM 12 C	2-speed cordless drill/driver ABSU 12 C	
Motor	Brushless	2-pole DC*	
Gearbox	4-speed	2-speed	
Speed, no load	400 / 700 / 1,400 / 2,500 rpm	400 / 1,300 rpm	
Max torque (hard/soft)	40 / 20 Nm	30 / 16 Nm	
Drill chuck clamping width	1/16 in - 1/2 in	3/64 in - 13/32 in	
Fastening	5/16 in x 7-7/8 in	1/4 in - 7-7/8 in	
Battery voltage	12V	12V	
Battery capacity	2.5 Ah	2.5 Ah	
Emission values (noise/vibration) can be found at www.fein.com/vibration		*suitable for Starlock and StarlockPlus accessories	

Emission values (noise/vibration) can be found at www.fein.com/vibration

The FEIN advantage: FEIN accessory extensions.

FEIN offers the right solution for almost every application. Our supplemental accessories expand the already enormous range of uses even further and make working with the FEIN system even more efficient. No matter whether on site or for stationary applications in the workshop.

General accessories



Table and drill stand holder

Perfect for precision cut-outs: the FEIN MULTIMASTER can be clamped to a table or work bench and the workpiece can be held securely. It can also be clamped to popular drill stands with a 1-11/16 in (43 mm) collar diameter.

Part Number	9 26 02 083 01 0



Adapter for FEIN oscillating tool (up to 2004) Adapter ring and mounting screw for earlier FEIN MULTIMASTER models Msx 636, Msx 636-1, and Msxe 636 II. Thanks to a close-fitting connection to the Starlock mount of the accessory, there is up to 40% improvement in torque transfer. Flat mounting screw for working level with the surface.

Part Number	3 52 22 927 05 0



Adapter

For mounting Starlock accessories on older FEIN SUPERCUTS (FSC 1.6 Q, FSC 1.7 Q, FSC 2.0 Q and AFSC 18) including mounting screw

Part Number

3 52 22 952 05 0



Tool case



Carrying case, empty* Plastic case with practical interior divisions, without tool or accessories. FMM 250 / 250 Q, FMT 250 / 250Q, 250 QSL *Special order only

Part Number



Carrying case, empty Plastic case with practical interior divisions, without tool or accessories. FMM 350 Q / QSL

Part Number



3 39 01 144 01 0



Systainer Plastic, interior dimensions:

H 3 x W 15- 5/64 x D 10-3/4 in (H 75 x W 383 x D 273 mm) The machine-specific Systainer insert must be ordered separately.

Part Number

Part Number

3 39 01 146 00 0

Systainer insert for FMM 350 Q / QSL

3 39 04 491 00 0



Batteries and chargers



Rapid charger ALG 50 For all FEIN li-ion batteries. Charging time from 35 min.

Order Number



Rapid charger ALG 30 For FEIN NiCad and li-ion batteries. Charging time from 25 min.

9 26 04 101 01 0

9 26 04 131 01 0



Order Number

Battery Li-ion with capacity indicator

Voltage V	Capacity Ah	Order Number
12	2.5	9 26 04 168 02 0
18	5	9 26 04 173 02 0
18	2.5	9 26 04 171 02 0

FEIN. Unverwüstliche Elektrowerkzeuge.



FEIN is the specialist when professional and extremely reliable power tools and special applications solutions are called for. As the inventor of the electric hand drill, FEIN has developed innovative and unbeatably efficient, professionally oriented solutions for over 140 years. In industrial and trade use, they prove themselves under the toughest continuous use.



Quick registration – extended warranty: The 3-year FEIN PLUS guarantee. We offer the 3-year FEIN PLUS guarantee on all FEIN power tools. You simply need to register your new FEIN power tool within 6 weeks

of purchase at **www.fein.com/warranty.**

Your specialist dealer will be happy to help:

US-EN

DE: C. & E. Fein GmbH, Tel. 07173 183-0, www.fein.de US: FEIN Power Tools Inc., Phone: 1-800-441-9878, www.feinus.com CA: FEIN Canada, Phone 905 890-1390, Toll Free: 1-800-265-2581, Toll Free (Français): 1-800-789-8181, www.fein.ca

